



# **ownCloud Administrators Manual**

*Release 6.0*

**The ownCloud developers**

February 28, 2014



# CONTENTS

<b>1</b>	<b>ownCloud 6.0 Admin Documentation</b>	<b>1</b>
1.1	Introduction . . . . .	1
1.2	Installation . . . . .	1
1.3	Configuration . . . . .	2
1.4	Maintenance . . . . .	2
<b>2</b>	<b>Installation</b>	<b>3</b>
2.1	Appliances . . . . .	3
2.2	Linux Distributions . . . . .	3
2.3	Mac OS X . . . . .	4
2.4	Windows 7 and Windows Server 2008 . . . . .	4
2.5	Univention Corporate Server . . . . .	10
2.6	Manual Installation . . . . .	17
2.7	PageKite Configuration . . . . .	26
2.8	Open Wrt . . . . .	26
<b>3</b>	<b>Configuration</b>	<b>27</b>
3.1	Apps Configuration . . . . .	27
3.2	User Management . . . . .	29
3.3	User Authentication with LDAP . . . . .	32
3.4	Background Jobs . . . . .	44
3.5	3rd-Party Configuration . . . . .	45
3.6	Automatic Configuration . . . . .	46
3.7	Custom Client Configuration . . . . .	48
3.8	Database Configuration . . . . .	48
3.9	Use Server-Side Encryption . . . . .	54
3.10	Knowledge Base Configuration . . . . .	54
3.11	Language Configuration . . . . .	55
3.12	Logging Configuration . . . . .	55
3.13	Mail Configuration . . . . .	56
3.14	Maintenance Mode Configuration . . . . .	61
3.15	Preview Configuration . . . . .	61
3.16	Reverse Proxy Configuration . . . . .	63
3.17	Uploading big files > 512MB (as set by default) . . . . .	64
3.18	Enabling uploading big files . . . . .	64
3.19	Custom Mount Configuration Web-GUI . . . . .	65
3.20	Custom Mount Configuration . . . . .	66
3.21	Custom User Backend Configuration . . . . .	72
3.22	Serving static files via web server . . . . .	73

<b>4</b>	<b>Maintenance</b>	<b>77</b>
4.1	Backing up ownCloud . . . . .	77
4.2	Updating ownCloud . . . . .	78
4.3	Restoring ownCloud . . . . .	79
4.4	Migrating ownCloud Installations . . . . .	79
<b>5</b>	<b>Issues</b>	<b>81</b>
<b>6</b>	<b>Indices and tables</b>	<b>83</b>

# OWNCLOUD 6.0 ADMIN DOCUMENTATION

## 1.1 Introduction

This is the administrators manual for ownCloud, a flexible, open source file sync and share solution. It comprises of the ownCloud server, as well as client applications for Microsoft Windows, Mac OS X and Linux (Desktop Client) and mobile clients for the Android and Apple iOS operating system.

### 1.1.1 Target audience

This guide is targeted towards people who want to install, administer and optimize ownCloud Server. If you want to learn how to use the Web UI, or how to install clients on the server, please refer to the [User Manual](#) or the [Desktop Client Manual](#) respectively.

### 1.1.2 Structure of this document

The next chapters describes how to set up ownCloud Server on different platforms and operating systems, as well as how to update existing installations.

Further chapters will then detail on integrating ownCloud into your existing environment, e.g. how to setup LDAP or how to mount your storage.

## 1.2 Installation

This chapter will introduce you to the installation of ownCloud in different scenarios.

If you want to just try ownCloud in a virtual machine without any configuration, check the section [Appliances](#), where you will find ready-to-use images.

- *Linux Distributions* (recommended)
- *Windows 7 and Windows Server 2008*
- *Manual Installation*
- *PageKite Configuration*
- *Univention Corporate Server*

- *Mac OS X (not supported)*
- *Appliances*

## 1.3 Configuration

This chapter covers ownCloud and web server configuration.

- *Apps Configuration*
- *User Management*
- *Database Configuration*
- *User Authentication with LDAP*
- *Custom Mount Configuration Web-GUI*
- *Custom Mount Configuration*
- *Background Jobs*
- *Mail Configuration*
- *Automatic Configuration*
- *Use Server-Side Encryption*
- *Uploading big files > 512MB (as set by default)*
- *Reverse Proxy Configuration*
- *Serving static files via web server*
- *3rd-Party Configuration*
- *Custom User Backend Configuration*
- *Custom Client Configuration*
- *Maintenance Mode Configuration*
- *Knowledge Base Configuration*
- *Logging Configuration*
- *Language Configuration*

## 1.4 Maintenance

This chapter covers maintenance tasks such as updating or migrating to a new version.

- *Migrating ownCloud Installations*
- *Updating ownCloud*

# INSTALLATION

## 2.1 Appliances

If you are looking for virtual machine images, check the Software Appliances section. The Hardware Appliances section is of interest for people seeking to run ownCloud on appliance hardware (i.e. NAS filers, routers, etc.).

### 2.1.1 Software Appliances

There are number of pre-made virtual machine-based appliances:

- [SUSE Studio](#), ownCloud on openSuSE, runnable directly from an USB stick.
- [Ubuntu charm](#), ownCloud

### 2.1.2 ownCloud on Hardware Appliances

These are tutorials provided by the user communities of the respective appliances:

- [QNAP Guide](#) for QNAP NAS appliances
- [OpenWrt Guide](#) for the popular embedded distribution for routers and NAS devices.
- [Synology Package](#) for Synology NAS products

---

#### Todo

Tutorials for running ownCloud on Dreamplug.

---

## 2.2 Linux Distributions

### 2.2.1 Supported Distribution Packages

Ready-to-use packages are available at [openSUSE Build Service](#) for a variety of Linux distributions.

If your distribution is not listed please follow *Manual Installation*.

## Additional installation guides and notes

**Fedora:** Make sure SELinux is disabled or else the installation process might fail.

**Archlinux:** There are two AUR packages for ownCloud: [stable version](#) and [development version](#).

**PCLinuxOS:** Follow the Tutorial [ownCloud, installation and setup](#) on the PCLinuxOS web site.

## 2.3 Mac OS X

---

**Note:** Due to an [issue](#) with Mac OS Unicode support, installing ownCloud Server 6.0 on Mac OS is currently not supported.

---

## 2.4 Windows 7 and Windows Server 2008

---

**Note:** You must move the data directory outside of your public root (See advanced install settings)

---

This section describes how to install ownCloud on Windows with IIS (Internet Information Services).

It assumes that you have a vanilla, non-IIS enabled Windows machine – Windows 7 or Server 2008. After enabling IIS, the steps are essentially identical for Windows 7 and Windows Server 2008.

For installing ownCloud physical access or a remote desktop connection is required. You should leverage MySQL as the backend database for ownCloud. If you do not want to use MySQL, it is possible to use Postgres or SQLite instead. Microsoft SQL Server is not yet support.

Enabling SSL is not yet covered by this section.

---

**Note:** If you make your desktop machine or server available outside of your LAN, you must maintain it. Monitor the logs, manage the access, apply patches to avoid compromising the system at large.

---

There are 4 primary steps to the installation, and then a 5th step required for configuring everything to allow files larger than the default 2MB.

1. Install IIS with CGI support – enable IIS on your Windows machine.
2. Install PHP – Grab, download and install PHP.
3. Install MySQL – Setup the MySQL server manager and enable ownCloud to create an instance.
4. Install ownCloud – The whole reason we are here!
5. Configure upload sizes and timeouts to enable large file uploads – So that you can upload larger files.

### 2.4.1 Activate IIS with CGI Support

#### Windows 7

1. Go to *Start -> Control Panel -> Programs*.
2. Under Programs and Features, there is link titled *Turn Windows Features on and Off*. Click on it.



3. There is a box labeled Internet Information Services, expand it.
4. Expand World Wide Web Services and all the folders underneath.
5. Select the folders as illustrated in the picture below to get your IIS server up and running.

You do not need an FTP server running, so you should tune that feature off for your server. You definitely need the IIS Management Console, as that is the easiest way to start, stop, restart you server, as well as where you change certificate options and manage items like file upload size. You must check the CGI box under Application Development Features, because CGI is how you enable PHP on IIS.

You have to turn off WebDAV publishing or the Windows WebDAV conflicts with the ownCloud WebDAV interface. This might already be turned off for you, just make sure it stays that way. The common HTTP features are the features you would expect from a web server. With the selections on this page, IIS will now serve up a web page for you.

Restart IIS by going to the IIS manager (*Start -> IIS Manager*).

Select your website, and on the far right side is a section titled *Manage Server*. Make sure that the service is started, or click *Start* to start the services selected. Once this is complete, you should be able to go to a web browser and navigate to <http://localhost>.

This should open the standard IIS 7 splash page, which is just a static image that says your web server is running. Assuming you were able to get the splash page, it is safe to say your web server is now up and running.

## Windows Server 2008

1. Go to *Start -> Control Panel -> Programs*.
2. Under Programs and Features, there is link titled *Turn Windows Features on and Off*. Click on it.
3. This will bring up the Server Manager.
4. In the server manager, Click on Roles, and then click Add Roles.
5. Use the *Add Roles Wizard* to add the web server role.
6. Make sure that, at a minimum, the same boxes are checked in this wizard that are checked in the Windows 7 Section. For example, make sure that the CGI box is checked under Application Development Features, and that WebDAV Publishing is turned off. With Remote Desktop Sharing turned on, the detailed role service list looks like the figure “Role Services”.
7. Restart IIS by going to the IIS manager (*Start -> IIS Manager*).
8. Select your website, and on the far right side is a section titled *Manage server*. Make sure that the service is started, or click “Start” to start the services selected.
9. Once this is complete, you should be able to go to a web browser and type *localhost*. This should open the standard IIS 7 splash page, which is just a static image that says your web server is running. Assuming you were able to get the splash page, it is safe to say your web server is now up and running. The next part of this “how to” installs PHP on the server.

### 2.4.2 Installing PHP

This part is also straightforward, but it is necessary to remind you that this is for IIS only.

1. Go to the following link and grab the [PHP installer](#) for version “VC9 Non Thread Safe” 32 or 64 bit based on your system.

---

**Note:** If you are using Apache, make sure you grab VC6 instead, lower on the page.

---

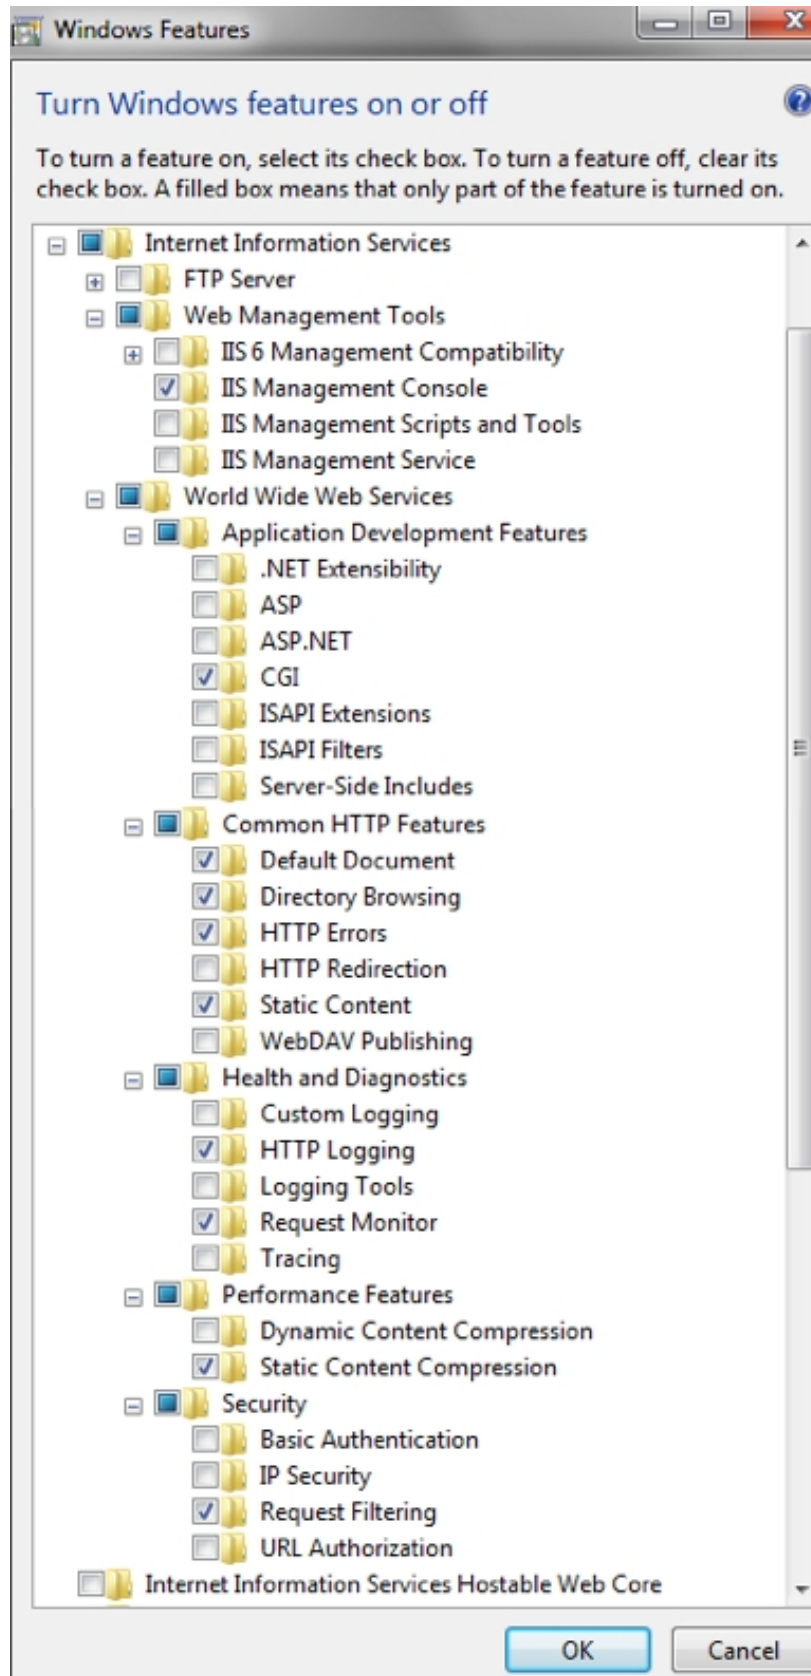













































Figure 2.1: Windows Features required for ownCloud on Windows 7

 **Role Services:** 40 installed

Role Service	Status
 Web Server	Installed
 Common HTTP Features	Installed
 Static Content	Installed
 Default Document	Installed
 Directory Browsing	Installed
 HTTP Errors	Installed
 HTTP Redirection	Installed
 WebDAV Publishing	Not installed
 Application Development	Installed
 ASP.NET	Installed
 .NET Extensibility	Installed
 ASP	Installed
 CGI	Installed
 ISAPI Extensions	Installed
 ISAPI Filters	Installed
 Server Side Includes	Not installed
 Health and Diagnostics	Installed
 HTTP Logging	Installed
 Logging Tools	Installed
 Request Monitor	Installed
 Tracing	Installed
 Custom Logging	Not installed
 ODBC Logging	Not installed
 Security	Installed
 Basic Authentication	Installed
 Windows Authentication	Installed
 Digest Authentication	Installed
 Client Certificate Mapping Authentication	Installed
 IIS Client Certificate Mapping Authentication	Installed
 URL Authorization	Installed
 Request Filtering	Installed
 IP and Domain Restrictions	Installed
 Performance	Installed
 Static Content Compression	Installed
 Dynamic Content Compression	Installed
 Management Tools	Installed
 IIS Management Console	Installed
 IIS Management Scripts and Tools	Installed
 Management Service	Installed
 IIS 6 Management Compatibility	Installed
 IIS 6 Metabase Compatibility	Installed
 IIS 6 WMI Compatibility	Installed
 IIS 6 Management Console	Installed
FTP Server	Not installed

2. Once through that login, select the location that is closest to you geographically.
3. Run that install wizard once it is downloaded. Read the license agreement, agree, select an install directory.
4. Then select IIS FastCGI as the install server.
5. Take the default selections for the items to install, and click next. Then click *install*.
6. After a few minutes, PHP will be installed. On to MySQL.

### 2.4.3 Installing MySQL

This part installs MySQL on your Windows machine.

1. Point your browser to <http://dev.mysql.com/downloads/> and download the latest community edition for your OS – the 32 or 64 bit version. Please download the **MSI Installer** as it will make life easier.
2. Once downloaded, install MySQL (5.5 at the time of writing). Select the Typical installation.
3. When that finishes, check the box to launch the MySQL Instance Configuration Wizard and click Finish.
4. Select a standard configuration, as this will be the only version of MySQL on this machine.
5. Select to install as a windows service, and Check the Launch the MySQL Server Automatically button.
6. Select the modify security settings box on the next page, and enter a password you will remember. You will need this password when you configure ownCloud.
7. Uncheck **enable** root access from remote machines” for security reasons.
8. Click execute, and wait while the instance is created and launched.
9. Click Finish when this is all complete.

Take particular note of your MySQL password, as the user name **root** and the password you select will be necessary later on in the ownCloud installation. As an aside, this link is an excellent resource for questions on how to configure your MySQL instance, and also to configure PHP to work with MySQL. This, however, is not strictly necessary as much of this is handled when you download ownCloud.

More information in this topic can be found in a [tutorial on the IIS web site](#).

### 2.4.4 Installing ownCloud

1. Download the latest version of ownCloud from <http://owncloud.org/download>.
2. It will arrive as a tar.bz2 file, and I recommend something like jZip for a free utility to unzip it.
3. Once you have the ownCloud directory unzipped and saved locally, copy it into your wwwroot directory (probably **C:\inetpub\wwwroot**).

---

**Note:** You cannot install directly into the directory **wwwroot** from jzip, as only the administrator can unzip into the **wwwroot** directory. If you save it in a different folder, and then move the files into **wwwroot** in windows explorer, it works. This will install ownCloud locally in your root web directory. You can use a subdirectory called owncloud, or whatever you want – the www root, or something else.

---

4. It is now time to give write access to the ownCloud directory to the ownCloud server: Navigate your windows explorer over to **inetpub/wwwroot/owncloud** (or your installation directory if you selected something different).
5. Right click and select properties. Click on the security tab, and click the button “to change permissions, click edit”.

6. Select the “users” user from the list, and check the box “write”.
7. Apply these settings and close out.
8. Now open your browser and go to <http://localhost/owncloud> (or localhost if it is installed in the root www directory). This should bring up the ownCloud configuration page.
9. At this page, you enter your desired ownCloud user name and password for the administrator, and expand the little arrow.
10. Select MySQL as the database, and enter your MySQL database user name, password and desired instance name – use the user name and password you setup for MySQL earlier in step 3, and pick any name for the database instance.

---

**Note:** The ownCloud admin password and the MySQL password CANNOT be the same in any way.

---

11. Click next, and ownCloud should have you logged in as the admin user, and you can get started exploring ownCloud, creating other users and more!

## 2.4.5 Ensure Proper HTTP-Verb handling

IIS must pass all HTTP and WebDAV verbs to the PHP/CGI handler, and must not try to handle them by itself. If it does, syncing with the Desktop and Mobile Clients will fail. Here is how to ensure your configuration is correct:

1. Open IIS Manager.
2. In the *Connections* bar, pick your site below *Sites*, or choose the top level entry if you want to modify the machine-wide settings.
3. Choose the *Handler Mappings* feature click *PHP\_via\_fastCGI*.
4. Choose *Request Restrictions* and find the *Verbs* tab.
5. Ensure *All Verbs* is checked.
6. Click *OK*.
7. Next, choose *Request Filtering* feature from IIS Manager.
8. Ensure that all verbs are permitted (or none are forbidden) in the *Verbs* tab.

Also, ensure that you did not enable the WebDAV authoring module, since ownCloud needs to be able to handle WebDAV on the application level.

## 2.4.6 Configuring ownCloud, PHP and IIS for Large File Uploads

Before going too nuts on ownCloud, it is important to do a couple of configuration changes to make this a useful service for you. You will probably want to increase the **max upload size**, for example. The default upload is set to **2MB**, which is too small for even most MP3 files.

To do that, simply go into your **PHP.ini** file, which can be found in your **C:\Program Files (x86)\PHP** folder. In here, you will find a **PHP.ini** file. Open this in a text editor, and look for a few key attributes to change:

- **upload\_max\_filesize** – change this to something good, like 1G, and you will get to upload much larger files.
- **post\_max\_size** – also change this size, and make it larger than the max upload size you chose, like 1G.

There are other changes you can make, such as the timeout duration for uploads, but for now you should be all set in the **PHP.ini** file.

Now you have to go back to IIS manager and make one last change to enable file uploads on the web server larger than 30MB.

1. Go to the start menu, and type **iis manager**.
2. Open IIS Manager Select the website you want enable to accept large file uploads.
3. In the main window in the middle double click on the icon **Request filtering**.
4. Once the window is opened you will see a bunch of tabs across the top of the far right, Select *Edit Feature Settings* and modify the *Maximum allowed content length (bytes)*
5. In here, you can change this to up to 4.1 GB.

---

**Note:** This entry is in BYTES, not KB.

---

You should now have ownCloud configured and ready for use.

## 2.5 Univention Corporate Server

Subscribers to the ownCloud Enterprise edition can also integrate with UCS (Univention Corporate Server).

### 2.5.1 Pre configuration

ownCloud makes use of the UCR, the Univention Configuration Registry. The values are being read during installation, most of them can be changed later, too. Changes done directly via ownCloud are not taken over to UCR. We think we found sane defaults, nevertheless you might have your own requirements. The installation script will listen to the UCR keys listed below. In case you want to override any default setting, simply add the key in question to the UCR and assign your required value.

Key	Default	Description	Introduced
owncloud/directory/data	/var/lib/owncloud	Specifies where the file storage will be placed	2012.0.1
owncloud/db/name	owncloud	Name of the MySQL database. ownCloud will create an own user for it.	2012.0.1
owncloud/user/quota	(empty)	The default quota, when a user is being added. Assign values in human readable strings, e.g. "2 GB". Unlimited if empty.	2012.0.1
owncloud/user/enabled	0	Wether a new user is allowed to use ownCloud by default.	2012.0.1
owncloud/group/enabled	0	Wether a new group is allowed to be used in ownCloud by default.	2012.4.0.4
owncloud/ldap/base/users	cn=users,\$ldap_base	The users-subtree in the LDAP directory. If left blank it will fall back to the LDAP base.	2012.4.0.4
owncloud/ldap/base/groups	cn=groups,\$ldap_base	The groups-subtree in the LDAP directory. If left blank it will fall back to the LDAP base.	2012.4.0.4

Continued on next page

Table 2.1 – continued from previous page

Key	Default	Description	Introduced
owncloud/ldap/groupMemberAssoc	uniqueMember	The LDAP attribute showing the group-member relationship. Possible values: uniqueMember, memberUid and member	2012.4.0.4
owncloud/ldap/tls	1	Whether to talk to the LDAP server via TLS.	2012.0.1
owncloud/ldap/disableMainServer	0	Deactivates the (first) LDAP Configuration	5.0.9
owncloud/ldap/cacheTTL	600	Lifetime of the ownCloud LDAP Cache in seconds	5.0.9
owncloud/ldap/UIDAttribute	(empty)	Attribute that provides a unique value for each user and group entry. Empty value for autodetection.	5.0.9
owncloud/ldap/loginFilter	(&(!(&(objectClass=posixAccount)(objectClass=shadowAccount)(objectClass=univentionMail)(objectClass=sambaSamAccount)(objectClass=simpleSecurityObject)(&(objectClass=person)(objectClass=organizationalPerson)(objectClass=inetOrgPerson))(!(uidNumber=0))(!(uid=*\$))(&(uid=%uid)(ownCloudEnabled=1))))	The LDAP filter that shall be used when a user tries to log in.	2012.0.1
owncloud/ldap/userlistFilter	(&(!(&(objectClass=posixAccount)(objectClass=shadowAccount)(objectClass=univentionMail)(objectClass=sambaSamAccount)(objectClass=simpleSecurityObject)(&(objectClass=person)(objectClass=organizationalPerson)(objectClass=inetOrgPerson))(!(uidNumber=0))(!(uid=*\$))(&(ownCloudEnabled=1))))	The LDAP filter that shall be used when the user list is being retrieved (e.g. for sharing)	2012.0.1
owncloud/ldap/groupFilter	(&(objectClass=posixGroup)(ownCloudEnabled=1))	The LDAP filter that shall be used when the group list is being retrieved (e.g. for sharing)	2012.4.0.4
owncloud/ldap/internalNameAttribute	uid	Attribute that should be used to create the user's owncloud internal name	5.0.9
owncloud/ldap/displayName	uid	The LDAP attribute that should be displayed as name in ownCloud	2012.0.1
owncloud/ldap/user/searchAttributes	uid,givenName,sn,description,employeeNumber,mail,primaryAddress	Attributes that should be used when searching for users (comma separated)	5.0.9
owncloud/ldap/user/quotaAttribute	ownCloudQuota	Name of the quota attribute. The default attribute is provided by owncloud-schema.	5.0.9

Continued on next page



Table 2.1 – continued from previous page

Key	Default	Description	Introduced
owncloud/ldap/user/homeAttribute	(empty)	Attribute that should be used to create the user's owncloud internal home folder	5.0.9
owncloud/ldap/group/displayName	cn	The LDAP attribute that should be used as groupname in ownCloud	2012.4.0.4
owncloud/ldap/group/searchAttributes	cn,description, mailPrimaryAddress	Attributes taken into consideration when searching for groups (comma separated)	5.0.9
owncloud/join/users/update	yes	Whether ownCloud LDAP schema should be applied to existing users	2012.0.1
owncloud/group/enableDomainUsers	1	Whether the group "Domain Users" shall be enabled for ownCloud on install	2012.4.0.4
owncloud/join/users/filter	(&(l(&(objectClass=posixAccount)(objectClass=shadowAccount)(objectClass=univentionMail)(objectClass=sambaSamAccount)(objectClass=simpleSecurityObject)(&(objectClass=person)(objectClass=organizationalPerson)(objectClass=inetOrgPerson)))(!!(uidNumber=0))(!(l(uid=*\$)(uid=owncloudsystemuser)(uid=join-backup)(uid=join-slave))))(!(objectClass=ownCloudUser)))	Filters, on which LDAP users the ownCloud schema should be applied to. The default excludes system users and already ownCloudUsers.	2012.0.1
owncloud/join/groups/filter	(empty)	Filters which LDAP groups will be en/disabled for ownCloud when running the script /usr/share/owncloud/update-groups.sh	2012.4.0.4

If you want to override the default settings, simply create the key in question in the UCR and assign your required value, for example:

```
ucr set owncloud/user/enabled=1
```

or via UMC:



## Univention Configuration Registry

The Univention Configuration Registry (UCR) is the local database for the configuration of UCS systems to access and edit system-wide properties in a unified manner. Caution: Changing UCR variables directly results in the change of the system configuration. Misconfiguration may cause an unusable system!

Entries

Category:  Search attribute:  Keyword:

<input type="checkbox"/> UCR variable	Value	Edit	Delete
<input type="checkbox"/> owncloud/db/name	owncloud		
<input type="checkbox"/> owncloud/directory/data	/var/lib/owncloud		
<input type="checkbox"/> owncloud/join/users/filter	(&!(objectClass=posixAccount)(objectClass=shadowAccount)(objectClass=univentionMail)(objectClass=sambaSamAccount)(objectClass=simpleSecurityObject)(objectClass=person)(objectClass=organizationalPerson)(objectClass=inetOrgPerson))(!(uidNumber=0))(!(uid=*\$)(uid=owncloudsystemuser)(uid=join-backup)(uid=join-slave))(!(objectClass=ownCloudUser))		
<input type="checkbox"/> owncloud/join/users/update	yes		
<input type="checkbox"/> owncloud/dap/displayName	uid		
	(&!(objectClass=posixAccount)(objectClass=shadowAccount))		

0 entries of 10 selected

[+ Add](#)

### 2.5.2 Installation


Now, we are ready to install ownCloud. This can be either done through the UCS App Center (recommended) or by downloading the packages.

#### UCS App Center

Open the Univention Management Console and choose the App Center module. You will see a variety of available applications, including ownCloud.

The screenshot shows the 'App Center' interface for managing applications on UCS. At the top, there are tabs for 'Overview' and 'App Center'. Below the tabs, there are navigation links for 'App management', 'Extended software management', and 'Repository Settings'. The main heading is 'Manage Applications for UCS'. A sub-heading states: 'This page lets you install and remove applications that enhance your UCS installation.' On the left, there is a search bar and a list of categories: All, Administration, CRM, DMS, Desktop, ERP, Groupware, Internet, Mail, School, System, Thin Client, and VoIP. The main area displays a grid of application tiles. The 'ownCloud 5 Internet' tile is highlighted, and a tooltip is visible over it with the text: 'cloud solution for data and file sync, share and view'. Other visible tiles include 'Kivitendo ERP', 'KIXbox Administration', 'Kolab Groupware Solution', 'Open-Xchange App Suite', 'ownCloud Internet', 'ownCloud 5 Internet', 'SugarCRM Community Edition', 'UCS@school Administration, School', 'Univention Corporate Client', 'Univention Demo App System', 'Z-Push for Zarafa', and 'Zarafa Collaboration Platform'. A 'Suggest new app' link is located at the bottom right of the application grid.

Click on ownCloud 5 and follow the instructions.

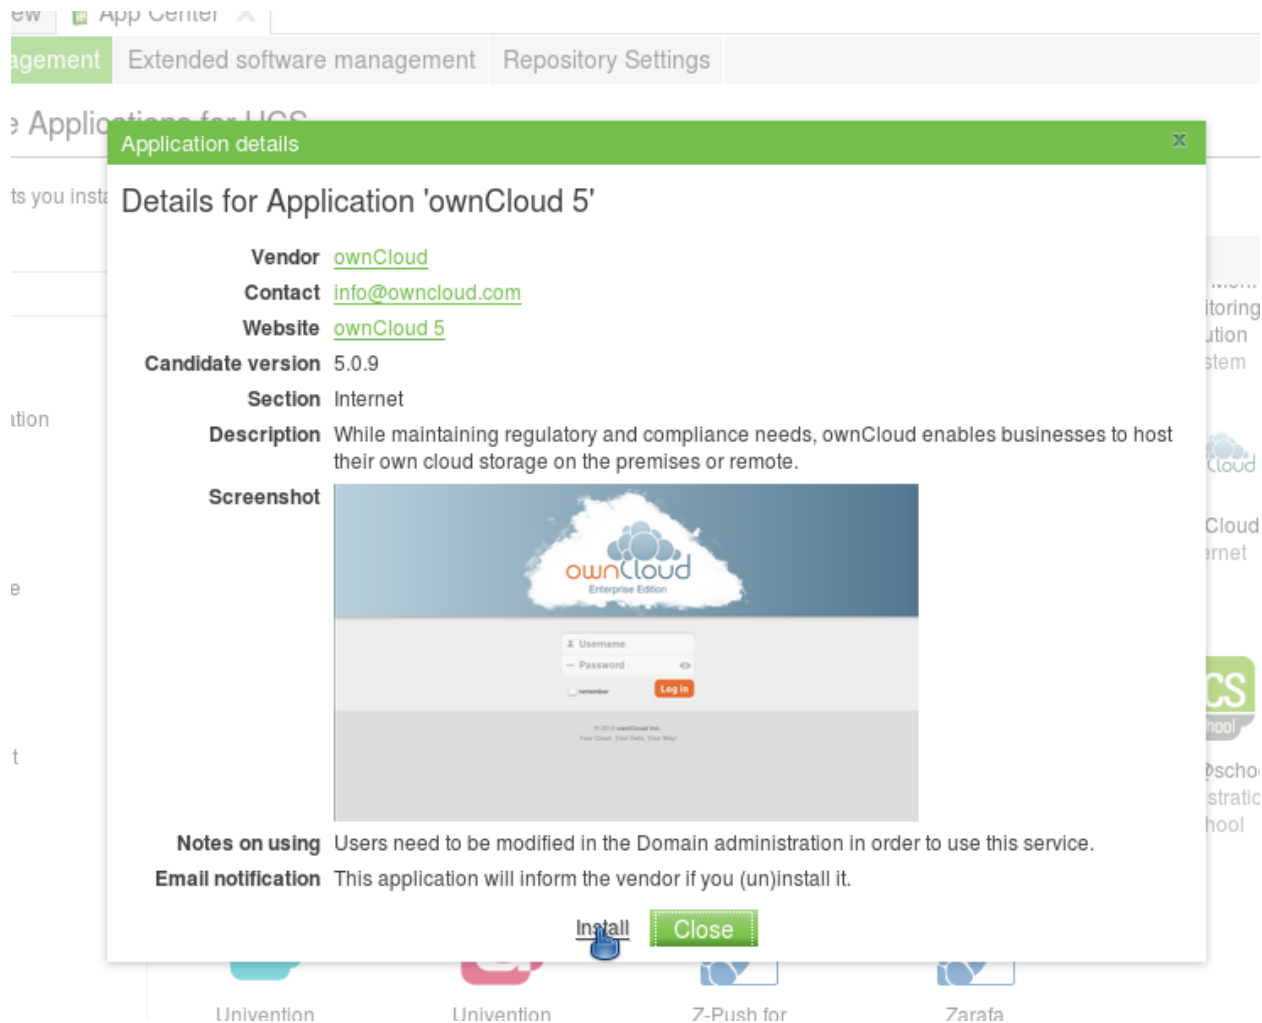

In the UCS App Center, you can also upgrade from ownCloud 4.5 by installing ownCloud 5.0. They are provided as separate apps. It is only possible to have one version of ownCloud installed.

### Manually by download

Download the integration packages [from our website](#) and install them from within your download folder (note: the package owncloud-unsupported is optional) via command line:

```
dpkg -i owncloud*.deb
```

ownCloud will be configured to fully work with LDAP.

### Reinstallation

When ownCloud was installed before and uninstalled via AppCenter or via command line using `apt-get remove`, ownCloud can be simply installed again. The old configuration will be used again.

When an older ownCloud was installed and has been purged (only possible via command line using `apt-get purge`) the old configuration is gone, but data is left. This blocks an installation. You can either install the old version and upgrade to ownCloud 5 or (re)move the old data. This is done by removing the MySQL database “ownCloud” using the command line:

```
mysql -u root -e "DROP DATABASE owncloud" -p`tail /etc/mysql.secret
```

In this case you probably also want to remove the data directory `/var/lib/owncloud` although this is not mandatory.

### 2.5.3 Postconfiguration (optional)


There is only one local admin user “owncloudadmin”, you can find his password in `/etc/owncloudadmin.secret`. Use this account, if you want to change basic ownCloud settings.

In the installation process a virtual host is set up (Apache is required therefore). If you want to modify the settings, edit `/etc/apache2/sites-available/owncloud` and restart the web server. You might want to do it to enable HTTPS connections. Besides that, you can edit the **.htaccess-File in `/var/www/owncloud/`**. In the latter file there are also the PHP limits for file transfer specified.

### 2.5.4 Using ownCloud

If you decided to enable every user by default to use ownCloud, simply open up <http://myserver.com/owncloud/> and log in with your LDAP credentials and enjoy.


If you did not, go to the UMC and enable the users who shall have access (see picture below). Then, login at <http://myserver.com/owncloud/> with your LDAP credentials.

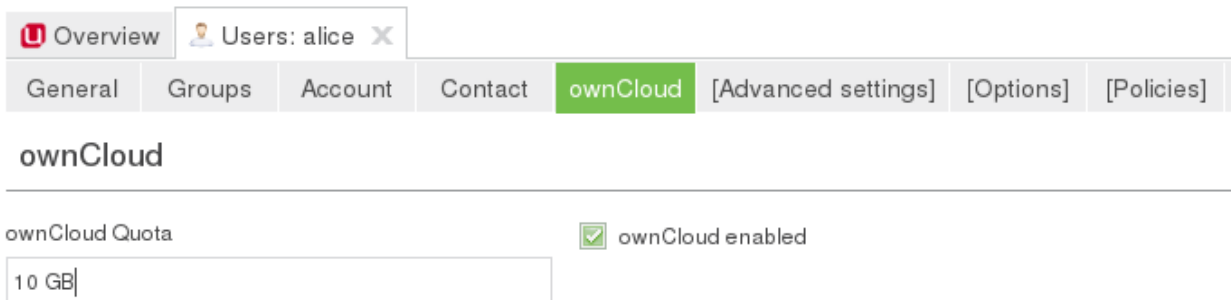

Updating users can also be done by the script `/usr/share/owncloud/update-users.sh`. It takes the following UCR variables as parameters: **owncloud/user/enabled** for enabling or disabling, **owncloud/user/quota** as the Quota value and **owncloud/join/users/filter** as LDAP filter to select the users to update.

#### Groups 2012.4.0.4

Since ownCloud Enterprise 2012.4.0.4 group support is enabled. Groups, that are activated for ownCloud usage, can be used to share files to instead of single users, for example. It is also important to note, that users can only share within groups where they belong to. Groups can be enabled and disabled via UCM as shown in the screen shot below.

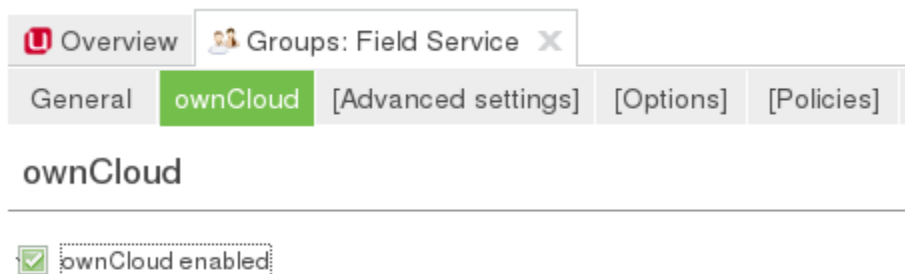

Another way to enable or disable groups is to use the script `/usr/share/owncloud/update-groups.sh`. Currently, it takes an argument which can be `1=enable groups` or `0=disable groups`. The filter applied is being taken from the UCR variable `owncloud/join/groups/filter`. In case it is empty, a message will be displayed.

## 2.6 Manual Installation

If you do not want to use packages, here is how you setup ownCloud on from scratch using a classic LAMP (Linux, Apache, MySQL, PHP) setup:

This document provides a complete walk-through for installing ownCloud on Ubuntu 12.04 LTS Server with Apache and MySQL. It also provides guidelines for installing it on other distributions, webservers and database systems.

### 2.6.1 Prerequisites

---

**Note:** This tutorial assumes you have terminal access to the machine you want to install owncloud on. Although this is not an absolute requirement, installation without it is highly likely to require contacting your hoster (e.g. for installing required modules).

---

To run ownCloud, your web server must have the following installed:

- PHP ( $\geq$  5.3.3 minimum, 5.4 or higher recommended)
- PHP module ctype
- PHP module dom
- PHP module GD
- PHP module iconv
- PHP module JSON
- PHP module libxml
- PHP module mb multibyte
- PHP module SimpleXML
- PHP module zip
- PHP module zlib

Database connectors (pick at least one):

- PHP module sqlite ( $\geq$  3, usually not recommendable for performance reasons)
- PHP module mysql
- PHP module pgsql (requires PostgreSQL  $\geq$  9.0)

*Recommended packages:*

- PHP module curl (highly recommended, some functionality, e.g. http user authentication, depends on this)
- PHP module fileinfo (highly recommended, enhances file analysis performance)
- PHP module bz2 (recommended, required for extraction of apps)
- PHP module intl (increases language translation performance)
- PHP module mcrypt (increases file encryption performance)

- PHP module openssl (required for accessing HTTPS resources)

Required for specific apps (if you use the mentioned app, you must install that package):

- PHP module ldap (for ldap integration)
- smbclient (for SMB storage)
- PHP module ftp (for FTP storage)

Recommended for specific apps (*optional*):

- PHP module exif (for image rotation in pictures app)

For enhanced performance (*optional* / select only one of the following):

- PHP module apc
- PHP module apcu
- PHP module xcache

For preview generation (*optional*):

- PHP module imagick
- avconv or ffmpeg
- OpenOffice or libreOffice

### Remarks:

- Please check your distribution, operating system or hosting partner documentation on how to install/enable these modules.
- Make sure your distribution's php version fulfils the version requirements specified above. If it doesn't, there might be custom repositories you can use. If you are e.g. running Ubuntu 10.04 LTS, you can update your PHP using a custom [PHP PPA](#):

```
sudo add-apt-repository ppa:ondrej/php5
sudo apt-get update
sudo apt-get install php5
```

- You don't need any WebDAV support module for your web server (i.e. Apache's mod\_webdav) to access your ownCloud data via WebDAV. ownCloud has a built-in WebDAV server of its own.

### Example installation on Ubuntu 12.04.4 LTS Server

On a machine running a pristine Ubuntu 12.04.4 LTS server, you would install the required and recommended modules for a typical ownCloud installation, using Apache and MySQL by issuing the following commands in a terminal:

```
sudo apt-get install apache2 mysql-server libapache2-mod-php5
sudo apt-get install php5-gd php5-json php5-mysql php5-curl
sudo apt-get install php5-intl php5-mcrypt php5-imagick
```

### Remarks:

- If you want to use any other combination of distribution, webserver or database, please consult the respective documentation.
- At the execution of each of the above commands you might be prompted whether you want to continue; press "Y" for Yes (that is if your system language is English. You might have to press a different key if you have a different system language).

- At the installation of the MySQL server, you will be prompted for a root password. Be sure to remember that password for later use.
- This installs the packages for the ownCloud core system. If you are planning on running additional apps, keep in mind that they might require additional packages. See the list above for details.

## 2.6.2 Download, extract and copy ownCloud to Your Web Server

First, download the archive of the latest ownCloud version:

- Navigate to <http://owncloud.org/install>
- Click “Tar or Zip file”
- In the opening dialog, chose the “Linux” link.
- This will start the download of a file named `owncloud-x.y.z.tar.bz2` (where `x.y.z` is the version number of the current latest version).
- Save this file on the machine you want to install ownCloud on.
- If that’s a different machine than the one you are currently working on, use e.g. FTP to transfer the downloaded archive file there.
- Note down the directory where you put the file.
- Extract the archive contents. Open a terminal on the machine you plan to run ownCloud on, and run:

```
cd path/to/downloaded/archive
tar -xjf owncloud-x.y.z.tar.bz2
```

where `:code:‘path/to/downloaded/archive‘` is to be replaced by the path where you put the downloaded archive, and `x.y.z` of course has to be replaced by the actual version number as in the file you have downloaded.

- Copy the ownCloud files to their final destination in the document root of your webserver (you can skip this step if you already downloaded and extracted the files there):

```
sudo cp -r owncloud /path/to/your/webserver/document-root
```

- If you don’t know where your webserver’s document root is located, consult its documentation. For Apache on Ubuntu 12.04 LTS for example, this would usually be `:code:‘/var/www‘`. So above command should look like this:

```
sudo cp -r owncloud /var/www
```

- The above assumes you want to install ownCloud into a subdirectory “owncloud” on your webserver. For installing it anywhere else, you’ll have to adapt the above command accordingly.

## 2.6.3 Set the Directory Permissions

The user running your web server must own at least the `apps/`, `data/` and `config/` directories in your ownCloud installation folder. The following command will change the ownership of the whole folder to that user.

- For Debian-based distributions (like Ubuntu, Debian or Linux Mint) and Gentoo, run:

```
sudo chown -R www-data:www-data /path/to/your/owncloud
```

- Continuing the example from above, for Ubuntu 12.04 LTS, where the install location was `:code:‘/var/www‘`, you would run:

```
sudo chown -R www-data:www-data /var/www/owncloud
```

- For ArchLinux should run (as root):

```
chown -R http:http /path/to/your/owncloud
```

- Fedora users should run (as root):

```
chown -R apache:apache /path/to/your/owncloud
```

When using an NFS mount for the data directory, do not change ownership as above. The simple act of mounting the drive will set proper permissions for ownCloud to write to the directory. Changing ownership as above could result in some issues if the NFS mount is lost.

## 2.6.4 Web Server Configuration

---

**Note:** You can use ownCloud over plain http, but we strongly encourage you to use SSL/TLS. If you don't use it, and you for example access your ownCloud over an unsecured WiFi, everyone in the same WiFi can grab your authentication data or the content of files synchronized while you are on the WiFi.

---

Apache is the recommended web server.

### Apache Configuration

#### Enabling SSL

An Apache installed under Ubuntu comes already set-up with a simple self-signed certificate. All you have to do is to enable the ssl module and the according site. Open a terminal and run

```
sudo a2enmod ssl
sudo a2ensite default-ssl
sudo service apache2 reload
```

If you are using a different distribution, check their documentation on how to enable SSL.

---

**Note:** Self-signed certificates have their drawbacks - especially when you plan to make your ownCloud server publicly accessible. You might want to consider getting a certificate signed by an official signing authority. If you're looking for a free certificate, you can consult e.g. this article: <https://www.sslshopper.com/article-free-ssl-certificates-from-a-free-certificate-authority.html>

---

### Configuring ownCloud

Since there was a change in the way versions 2.2 and 2.4 are configured, you'll have to find out which Apache version you are using.

Usually you can do this by running one of the following commands:

```
sudo apachectl -v
apache2 -v
```

Example output:



```
Server version: Apache/2.2.22 (Ubuntu)
Server built:   Jul 12 2013 13:37:10
```

This indicates an Apache of the 2.2 version branch (as e.g. you will find on Ubuntu 12.04 LTS).

Example config for Apache 2.2:

```
<Directory /path/to/your/owncloud/install>
    Options Indexes FollowSymLinks MultiViews
    AllowOverride All
    Order allow,deny
    allow from all
</Directory>
```

Example config for Apache 2.4:

```
<Directory /path/to/your/owncloud/install>
    Options Indexes FollowSymLinks MultiViews
    AllowOverride All
    Require all granted
</Directory>
```

- This config entry needs to go into the configuration file of the “site” you want to use.
- On a Ubuntu system, this typically is the “default-ssl” site (to be found at **:code:/etc/apache2/sites-available/default-ssl**).
- Edit the site file with your favorite editor (note that you’ll need root permissions to modify that file). For Ubuntu 12.04 LTS, you could for example run the following command in a Terminal:

```
sudo nano /etc/apache2/sites-available/default-ssl
```

- Add the entry shown above immediately before the line containing

```
</VirtualHost>
```

(this should be one of the last lines in the file).

- For ownCloud to work correctly, we need the module `mod_rewrite`. Enable it by running:

```
sudo a2enmod rewrite
```

- In distributions that do not come with `a2enmod` the module needs to be enabled manually by editing the config Apache files, usually `/etc/httpd/httpd.conf`. consult the Apache documentation or your distributions documentation.
- Then restart Apache.
  - For Ubuntu systems (or distributions using `upstartd`), run:
 

```
sudo service apache2 restart
```
  - For `systemd` systems (Fedora, ArchLinux, OpenSUSE), run:
 

```
systemctl restart httpd.service
```
- In order for the maximum upload size to be configurable, the `.htaccess` file in the ownCloud folder needs to be made writable by the server (this should already be done, see section [Set the Directory Permissions](#)).
- You should make sure that any built-in WebDAV module of your web server is disabled (at least for the ownCloud directory), as it will interfere with ownCloud’s built-in WebDAV support.

If you need the WebDAV support in the rest of your configuration, you can turn it off specifically for the ownCloud entry by adding the following line in the configuration of your ownCloud. In above “<Directory ...” code, add the following line directly after the “allow from all” / “Require all granted” line):

```
Dav Off
```

- Furthermore, you need to disable any server-configured authentication for ownCloud, as it’s internally using Basic authentication for its \*DAV services. If you have turned on authentication on a parent folder (via e.g. an “AuthType Basic” directive), you can turn off the authentication specifically for the ownCloud entry; to do so, in above “<Directory ...” code, add the following line directly after the “allow from all” / “Require all granted” line):

```
Satisfy Any
```

A minimal site configuration on Ubuntu 12.04 might look like this:

```
<IfModule mod_ssl.c>
<VirtualHost _default_:443>
    ServerName YourServerName
    ServerAdmin webmaster@localhost
    DocumentRoot /var/www
    <Directory />
        Options FollowSymLinks
        AllowOverride None
    </Directory>
    <Directory /var/www/>
        Options Indexes FollowSymLinks MultiViews
        AllowOverride None
        Order allow,deny
        allow from all
    </Directory>
    ErrorLog ${APACHE_LOG_DIR}/error.log
    LogLevel warn
    CustomLog ${APACHE_LOG_DIR}/ssl_access.log combined
    SSLEngine on
    SSLCertificateFile      /etc/ssl/certs/ssl-cert-snakeoil.pem
    SSLCertificateKeyFile  /etc/ssl/private/ssl-cert-snakeoil.key
    <FilesMatch "\.(cgi|shtml|phtml|php)$">
        SSLOptions +StdEnvVars
    </FilesMatch>
    <Directory /usr/lib/cgi-bin>
        SSLOptions +StdEnvVars
    </Directory>
    BrowserMatch "MSIE [2-6]" \
        nokeepalive ssl-unclean-shutdown \
        downgrade-1.0 force-response-1.0
    BrowserMatch "MSIE [17-9]" ssl-unclean-shutdown
    <Directory /var/www/owncloud>
        Options Indexes FollowSymLinks MultiViews
        AllowOverride All
        Order allow,deny
        Allow from all
        # add any possibly required additional directives here
        # e.g. the Satisfy directive:
        Satisfy Any
    </Directory>
</VirtualHost>
</IfModule>
```

When using ssl, take special note on the ServerName. You should specify one in the server configuration, as well as in the CommonName field of the certificate. If you want your ownCloud to be reachable via the internet, then set both these to the domain you want to reach your ownCloud under.

**Note:** By default, the certificates' CommonName will get set to the host name at the time when the ssl-cert package was installed.

## Nginx Configuration

- You need to insert the following code into **your nginx config file**.
- Adjust **server\_name**, **root**, **ssl\_certificate** and **ssl\_certificate\_key** to suit your needs.
- Make sure your SSL certificates are readable by the server (see <http://wiki.nginx.org/HttpSslModule>).

```

upstream php-handler {
    server 127.0.0.1:9000;
    #server unix:/var/run/php5-fpm.sock;
}

server {
    listen 80;
    server_name cloud.example.com;
    return 301 https://$server_name$request_uri; # enforce https
}

server {
    listen 443 ssl;
    server_name cloud.example.com;

    ssl_certificate /etc/ssl/nginx/cloud.example.com.crt;
    ssl_certificate_key /etc/ssl/nginx/cloud.example.com.key;

    # Path to the root of your installation
    root /var/www/;

    client_max_body_size 10G; # set max upload size
    fastcgi_buffers 64 4K;

    rewrite ^/caldav(.*)$ /remote.php/caldav$1 redirect;
    rewrite ^/carddav(.*)$ /remote.php/carddav$1 redirect;
    rewrite ^/webdav(.*)$ /remote.php/webdav$1 redirect;

    index index.php;
    error_page 403 /core/templates/403.php;
    error_page 404 /core/templates/404.php;

    location = /robots.txt {
        allow all;
        log_not_found off;
        access_log off;
    }

    location ~ ^/(data|config|\.ht|db_structure\.xml|README) {
        deny all;
    }

```

```
location / {
    # The following 2 rules are only needed with webfinger
    rewrite ^/.well-known/host-meta /public.php?service=host-meta last;
    rewrite ^/.well-known/host-meta.json /public.php?service=host-meta-json last;

    rewrite ^/.well-known/carddav /remote.php/carddav/ redirect;
    rewrite ^/.well-known/caldav /remote.php/caldav/ redirect;

    rewrite ^(/core/doc/[^\/]+)/$ $1/index.html;

    try_files $uri $uri/ index.php;
}

location ~ ^(\.+\.(php|\.*)?)$ {
    try_files $1 = 404;

    include fastcgi_params;
    fastcgi_param SCRIPT_FILENAME $document_root$1;
    fastcgi_param PATH_INFO $2;
    fastcgi_param HTTPS on;
    fastcgi_pass php-handler;
}

# Optional: set long EXPIRES header on static assets
location ~* ^.+\. (jpg|jpeg|gif|bmp|ico|png|css|js|swf)$ {
    expires 30d;
    # Optional: Don't log access to assets
    access_log off;
}
}
```

To enable SSL support: - Remove the server block containing the redirect - Change **listen 443 ssl** to **listen 80**; - Remove **ssl\_certificate** and **ssl\_certificate\_key**. - Remove **fastcgi\_params HTTPS on**;

---

**Note:** If you want to effectively increase maximum upload size you will also have to modify your **php-fpm configuration (usually at /etc/php5/fpm/php.ini)** and increase **upload\_max\_filesize** and **post\_max\_size** values. You'll need to restart php5-fpm and nginx services in order these changes to be applied.

---

## Lighttpd Configuration

This assumes that you are familiar with installing PHP application on lighttpd.

It is important to note that the **.htaccess** files used by ownCloud to protect the **data** folder are ignored by lighttpd, so you have to secure it by yourself, otherwise your **owncloud.db** database and user data are publicly readable even if directory listing is off. You need to add two snippets to your lighttpd configuration file:

Disable access to data folder:

```
$HTTP["url"] =~ "^/owncloud/data/" {
    url.access-deny = ("" )
}
```

Disable directory listing:

```
$HTTP["url"] =~ "^/owncloud($|/)" {
    dir-listing.activate = "disable"
}
```

## Yaws Configuration

This should be in your **yaws\_server.conf**. In the configuration file, the **dir\_listings = false** is important and also the redirect from **/data** to somewhere else, because files will be saved in this directory and it should not be accessible from the outside. A configuration file would look like this

```
<server owncloud.myserver.com/>
  port = 80
  listen = 0.0.0.0
  docroot = /var/www/owncloud/src
  allowed_scripts = php
  php_handler = <cgi, /usr/local/bin/php-cgi>
  errormod_404 = yaws_404_to_index_php
  access_log = false
  dir_listings = false
  <redirect>
    /data == /
  </redirect>
</server>
```

The Apache **.htaccess** file that comes with ownCloud is configured to redirect requests to nonexistent pages. To emulate that behaviour, you need a custom error handler for yaws. See this [github gist for further instructions](#) on how to create and compile that error handler.

## Hiawatha Configuration

Add **WebDAVapp = yes** to the ownCloud virtual host. Users accessing WebDAV from MacOS will also need to add **AllowDotFiles = yes**.

Disable access to data folder:

```
UrlToolkit {
    ToolkitID = denyData
    Match ^/data DenyAccess
}
```

## Microsoft Internet Information Server (IIS)

See *Windows 7 and Windows Server 2008* for further instructions.

## 2.6.5 Follow the Install Wizard

Open your web browser and navigate to your ownCloud instance. If you are installing ownCloud on the same machine as you will access the install wizard from, the url will be: <http://localhost/> (or <http://localhost/owncloud>).

For basic installs we recommend SQLite as it is easy to setup (ownCloud will do it for you). For larger installs you should use MySQL or PostgreSQL. Click on the Advanced options to show the configuration options. You may enter admin credentials and let ownCloud create its own database user, or enter a preconfigured user. If you are not using Apache as the web server, please set the data directory to a location outside of the document root. See the advanced install settings.

## 2.7 PageKite Configuration

You can use this [PageKite how to](#) to make your local ownCloud accessible from the internet using PageKite.

## 2.8 Open Wrt

Here you can find a [tutorial for open Wrt](#)

# CONFIGURATION

## 3.1 Apps Configuration

After you have installed ownCloud, you might realize that it would be nice to provide an additional function on top of the core functionality in your ownCloud installation.

With ownCloud installation, you will find some apps enabled by default. To see which applications are enabled, click on Apps button on the web interface navigation to go into applications page:

The screenshot shows the ownCloud administrator interface. On the left is a sidebar menu with the following items: Share Files, Text Editor, Updater, Versions, Video Viewer, App Framework (with a '3rd Party' badge), Encryption, External user support, LDAP user and group backend, ownCloud dependencies info, Tasks, WebDAV user backend, and More Apps ... The main content area displays the 'Encryption' app configuration. The app name 'Encryption' is in bold, followed by version '0.5' and a badge 'Internal App'. Below this is a description: 'The new ownCloud 5 files encryption system. After the app was enabled you need to re-login to initialize your encryption keys.' The license information reads 'AGPL-licensed by Sam Tuke, Bjoern Schiessle, Florin Peter'. At the bottom of the configuration area is an 'Enable' button.

### Administrator application page

In this page, you can enable or disable applications simply by clicking on their names. Enabled applications will be shown in **bold** while disabled ones will be shown in normal font. If the app is not developed by ownCloud, it will have the *3rd party* notice next to it. To see what an application does, clicking on its name will show a description on the right side of the same page.

To install new apps, you can use *More apps* button or check out the [ownCloud apps store](#). There you will find a lot of ready-to-use apps provided by the ownCloud community.

If you would like to add your own app, please use *Add your App...* button on the same page. This will redirect you to our [Developer Center](#).

### 3.1.1 Parameters

Parameters are set in the `config/config.php` inside the `$CONFIG` array.

#### Use custom app directories

Use the `apps_paths` array to set the apps folders which should be scanned for available apps and/or where user specific apps should be installed. The key `path` defines the absolute file system path to the app folder. The key `url` defines the http web path to that folder, starting at the ownCloud web root. The key `writable` indicates if a user can install apps in that folder.

---

**Note:** If you want to make sure that the default `/apps/` folder only contains apps shipped with ownCloud, you should follow the example and set-up a `/apps2/` folder which will be used to store all apps downloaded by users

---

```
<?php

"apps_paths" => array (
    0 => array (
        "path"      => OC::$SERVERROOT."/apps",
        "url"       => "/apps",
        "writable"  => false,
    ),
    1 => array (
        "path"      => OC::$SERVERROOT."/apps2",
        "url"       => "/apps2",
        "writable"  => true,
    ),
),
```

#### Use your own appstore

If you want to allow the installation of apps from the apps store you have to set `appstoreenabled` parameter, but this can only be done if at least one of the configured apps directories is writable.

The `appstoreurl` is used to set the http path to the ownCloud apps store. The appstore server has to use OCS (Open Collaboration Services).

```
<?php

"appstoreenabled" => true,
"appstoreurl"    => "http://api.apps.owncloud.com/v1",
```

#### Guard against malicious 3rdparty code

Finally you can enable checks for malicious code fragments of 3rd-party apps by setting the `appcodechecker` parameter.



```
<?php
```

```
"appcodechecker" => false,
```

## 3.2 User Management

ownCloud administrators can easily manage users via the web interface. To go into user management page, click your username on the web interface and select *Users*. A page similar to the image below will be shown:

Login Name	Password	Groups	Create	Default Storage	1 GB
Username	Full Name	Password	Groups	Group Admin	Storage
<b>A</b> admin	admin	••••••	admin ▼	Group Admin ▼	Default ▼
<b>T</b> test	test	••••••	test ▼	test ▼	1 GB ▼
<b>T</b> test2	test2	••••••	admin, test ▼	Group Admin ▼	Default ▼
<b>T</b> test3	test3	••••••	admin ▼	Group Admin ▼	512 MB ▼

### Users management page

A fictive use case will help you understand the concept of users, user groups and group admins.

Think of a small, 25-member staff company, named “Cloud Lovers”, that is lead by its founder Richard. In this company Bob acts as IT operator and recently set up ownCloud. Being the installing user, Bob is member of the so called “admin” user group of ownCloud. His colleague Tom, who provides support if Bob is on holiday, is member of the “admin” user group as well. All employees, including Bob and Tom, are members of the user group “Internal”, that is used to share data across the company. Mostly for operational data, that should not be accessible to all employees, Bob created the “Administration” user group having two members: Richard and his assistant Susan. Richard is group admin of this user group, so he can manage the members of the “Administration” user group on his own.

### 3.2.1 Users

A user represents an account of the ownCloud installation. In this section the core properties are listed.

**Login name (Username)** This is the unique ID of a ownCloud user (e.g. test, jon.doe).

**Full Name** This is the name that is used all over the user interface to identify the user i.e. when sharing data or sending mails. If no display name is set, it defaults to the login name.

**Password** This is the password the user uses to login to ownCloud.

**Groups** This is a list of security groups the user is assigned to. By default the user is not member of any user group.

**Group Admin** This is a list of security groups the user has administration privileges for. By default the user is not registered as group admin for any user group.

**Storage** This is the maximum disk space that may be used by the user. If the user reaches this limit he/she is not able to upload or sync further data. The storage quota is specified in the format *Number Unit* (e.g. 100 B (byte), 50 KB (kilobyte), 20 MB (megabyte), 5 GB (gigabyte)). If no unit is given, the number is interpreted as bytes.

Each user is able to change its display name and password.

## Create a user

Before users can sign in and share data, they need ownCloud user accounts.

To create a user account:

1. Enter the new user's **Login Name** and its initial **Password** in the appropriate fields.
2. (Optional) Select the **Groups** to which you want to assign the new user.
3. Click **Create**.
4. (Optional) Edit additional user settings.

To set other user settings, such as setting a display name or limiting the user's storage, see instructions as follows.

Created users will have the storage specified on *Default Storage* setting on the same page.

Login names may contain letters (a-z, A-Z), numbers (0-9), dashes (-), underscores (\_), periods (.) and at signs (@).

## Reset a user's password

To reset a user's password:

1. Hover the line of the user.
2. Click on the **pencil icon** next to the password field.
3. Enter the user's new password in the password field and then hit the **Enter** key of your keyboard.

Remember to provide the user with the new login information after you have reset the password.

## Rename a user

Each ownCloud user has two names: an unique *login name* used for authentication, and a *display name* (e.g. the user's first name and last name) used in the user interface. You can edit the display name of a user, but you cannot change the login name of any user.

To set a user's display name:

1. Hover the line of the user.
2. Click on the **pencil icon** next to the display name field.
3. Enter the user's new display name in the corresponding field and then hit the **Enter** key of your keyboard.

## Grant administrator privileges to a user

If a user has administrator privileges, the user has the right to manage other users. Within ownCloud there are two types of administrators: *Super Administrators* and *Group Administrators*.

Group administrators have the management rights to:

- Create new users and assign them to the group of the group administrator
- Edit and delete users that are assigned to the group of the group administrator

Group administrators cannot access system settings or modify installation-wide configuration like the default storage.

To assign the *super administrator* role to a user:

1. Use the drop-down list in *Groups* column of the user

2. Assign the user to the “admin” user group

To assign the *group administrator* role to a user:

Find the user and select the user groups from the **Group Admin** drop-down list you want the user become group administrator for.

### Assign a user to a user group

To assign a user to a user group:

Find the user and select the user groups from the **Groups** drop-down list you want to assign the user to. You can use *add group* link to create a new group to assign the user to. You can assign the user more than one group by checking multiple groups.

---

**Note:** If a file/folder is shared with a group, newly created users will immediately have access to the share.

---

---

**Note:** If you assign a user to the *admin* user group, the user will become a *Super Administrator* with unlimited privileges.

---

### Limit a user’s storage

To limit a user’s storage quota:

Find the user and select an item from the **Storage** drop-down list.

- If you select *Default*, the default storage limit, specified in the action bar at the top, is applied.
- If you select *Unlimited*, the user is not limited until the total disk space is consumed.
- If you want to enter a custom limit, select *Other...*, enter the storage quota of your choice and hit the **Enter** key of your keyboard.

If you edit the value of the **Default Storage** field in the action bar, all users with storage *Default* are affected by this change, i.e. changing the default storage from *Unlimited* to *1 GB* will cause all users with *Default* storage being limited to 1 GB storage each.

### Delete User

**Important considerations before deleting a user:**

- The user will no longer be able to sign in to your ownCloud installation.
- You cannot revert the deletion or restore a deleted account.

---

**Note:** If this user had a share with a group or user, the share also will be deleted permanently.

---

To delete a user account:

1. Hover the line of the user you want to delete.
2. Click the **cross icon** at the end of the line.

---

**Note:** If you accidentally delete a user, you can use undo button shown on notification bar at the top of the page.

---

## 3.2.2 User Groups

### Create Group

To create a user group:

1. Open the **Groups** drop-down list in the action bar.
2. Click **add group**.
3. Enter the name of the new group and then hit the **Enter** key of your keyboard.

You can *assign users* to the newly created user groups anytime by using users' group drop-down list.

### Edit/Delete Group

Currently, groups cannot be edited (e.g. renamed) or removed. This feature will be available in a future version of ownCloud.

---

**Note:** If you have direct access to the database, you can manually delete the group from database tables `oc_groups` and `oc_group_user`.

---

## 3.3 User Authentication with LDAP

ownCloud ships an LDAP backend, which allows full use of ownCloud for user logging in with LDAP credentials including:

- LDAP group support
- File sharing with users and groups
- Access via WebDAV and of course ownCloud Desktop Client
- Versioning, external Storages and all other ownCloud goodies

To connect to an LDAP server the configuration needs to be set up properly. Once the LDAP backend is activated (Apps Sidebar→Apps, choose **LDAP user and group backend**, click on **Enable**) the configuration can be found on Settings→Admin. Read on for a detailed description of the configuration fields.

### 3.3.1 Configuration

The LDAP backend follows a wizard-like approach, splitted into four tabs. A correctly completed first tab (“Server”) is mandatory to access the other tabs. Also, the other tabs need to be reviewed by the admin, however the necessary settings are detected automatically. An indicator will show whether the configuration is incomplete, incorrect or OK.

The settings are changed automatically, as soon as a input element loses the focus, i.e. the cursor is taken away by clicking somewhere else or pressing the tabulator key.

The other tabs can be navigated by clicking the tabs or by using the *Continue* and *Back* buttons. They are located on the lower right, next to the status indicator.

## Server

The server tab contains the basic information on the LDAP server. They make sure that ownCloud will be able to connect to LDAP and be able to read data from there. The admin at least needs to provide a hostname. If anonymous access is not possible he will need to provide an account DN and a password, too. ownCloud attempts to auto-detect the port and the base DN.

The screenshot shows the 'Server' configuration tab in the ownCloud interface. At the top, there are four tabs: 'Server', 'User Filter', 'Login Filter', and 'Group Filter'. The 'Server' tab is active. Below the tabs, there is a dropdown menu labeled '1. Server:' with a downward arrow. To its right is a 'Delete Configuration' button. Below these are five input fields: 'Host', 'Port', 'User DN', 'Password', and 'One Base DN per line'. At the bottom right, there is a 'Continue' button and a 'Help' icon. At the bottom center, the text 'Configuration incomplete' is displayed.

**Server configuration:** ownCloud can be configured to connect to multiple LDAP servers. Using this control you can pick a configuration you want to edit or add a new one. The button **Delete Configuration** deletes the current configuration.

**Host:** The host name of the LDAP server. It can also be a **ldaps://** URI, for instance.

It is also possible to pass a port number, which speeds up port detection. It is especially useful, if a custom port is used. ownCloud will move the value to the port field subsequently.

Examples:

- *directory.my-company.com*
- *ldaps://directory.my-company.com*
- *directory.my-company.com:9876*

**Port:** The port on which to connect to the LDAP server. The field is disabled in the beginning of a new configuration. The port will be detected automatically, if the LDAP server is running on a standard port. After ownCloud attempted to determine the port, the field will be enabled for user input. A successfully found port will be inserted by ownCloud, of course.

Example:

- 389

**User DN:** The name as DN of a user who is able to do searches in the LDAP directory. Leave it empty for anonymous access. It is recommended to have a special system user for ownCloud.

Example:

- `uid=owncloudsystemuser,cn=sysusers,dc=my-company,dc=com`

**Password:** The password for the user given above. Empty for anonymous access.

**Base DN:** The base DN of LDAP, from where all users and groups can be reached. Separated Base DN's for users and groups can be set in the Advanced tab. Nevertheless, this field is mandatory. ownCloud attempts to determine the Base DN according to the provided User DN or the provided Host.

Example:

- `dc=my-company,dc=com`

## User Filter

The settings in the user filter tab determine which LDAP users will appear and are allowed to log in into ownCloud. It is also possible to enter a raw LDAP filter.

Limit the access to ownCloud to users meeting this criteria:

only those object classes:

only from those groups:

[Edit raw filter instead](#)

51 users found

Configuration incomplete [Back](#) [Continue](#) [Help](#)

**only those object classes:** ownCloud will determine the object classes that are typically available for (ideally only) user objects in your LDAP. ownCloud will automatically select the object class that returns the highest amount of users. You can select multiple object classes.

**only from those groups:** If your LDAP server supports the member-of-overlay in LDAP filters, you can define that only users from one or more certain groups are allowed to appear and log in into ownCloud. By default, no value will be selected. You can select multiple groups.

If your LDAP server does not support the member-of-overlay in LDAP filters, the input field is disabled. Please contact your LDAP administrator.

**Edit raw filter instead:** Clicking on this text will toggle the filter mode. Instead of the assisted approach, you can enter the raw LDAP filter directly in the appearing field.

Example:

- `objectClass=inetOrgPerson`

**x users found:** This is an indicator that tells you approximately how many users will be allowed to access ownCloud. The number will update after any change you do.

## Login Filter

The settings in the login filter tab determine which user detail will be compared to the login value entered by the user. It is possible to allow multiple user details. It is also possible to enter a raw LDAP filter.

The user limitation as set up in the previous tab is in effect, unless you manually configure the filter in raw mode.

**LDAP Username:** If this value is checked, the login value will be compared to the username in the LDAP directory. The corresponding attribute, usually *uid* or *samaccountname* will be detected automatically by ownCloud.

**LDAP Email Address:** If this value is checked, the login value will be compared to an email address in the LDAP directory. The email address will be looked for in the *mailPrimaryAddress* and *mail* attributes.

**Other Attributes:** This multiselect box allows you to select other attributes for the comparison. The list is generated automatically based on the attributes that a user object contains in your LDAP server.

**Edit raw filter instead:** Clicking on this text will toggle the filter mode. Instead of the assisted approach, you can enter the raw LDAP filter directly in the appearing field.

The **%uid** placeholder will be replaced with the login name entered by the user upon login. When you enter the filter manually.

Examples:

- only username: `uid=%uid`
- username or email address: `(!(uid=%uid)(mail=$uid))`

## Group Filter

The settings in the group filter tab determine which groups will be available in ownCloud. It does not have any restrictions on logins, this has been dealt with in the prior tabs. It is also possible to enter a raw LDAP filter.

By default, no groups will be available in ownCloud. You actively need to enable groups.

**only those object classes:** ownCloud will determine the object classes that are typically available for (ideally only) group objects in your LDAP. ownCloud will only list object classes that return at least one group object. You can select multiple object classes. A typical object class is “group”, or “posixGroup”.

**only from those groups:** This setting lets you pick certain groups that shall be available in ownCloud. This field follows a whitelist approach. ownCloud will generate a list of available groups found in your LDAP server. You can select multiple groups.

**Edit raw filter instead:** Clicking on this text will toggle the filter mode. Instead of the assisted approach, you can enter the raw LDAP filter directly in the appearing field.

Example:

- *objectClass=group*
- *objectClass=posixGroup*

**y groups found:** This is an indicator that tells you approximately how many groups will be available in ownCloud. The number will update after any change you do.

### 3.3.2 Advanced Settings

In the LDAP Advanced settings section you can define options, that are less common to set. They are not needed for a working connection. It can also have a positive effect on the performance to specify distinguished bases for user and group searches.

The Advanced Settings are structured into three parts:



- Connection Settings
- Directory Settings
- Special Attributes

## Connection Settings

Figure 3.1: LDAP Advanced Settings, section Connection Settings

**Configuration Active:** Enables or Disables the current configuration. Disabled configuration will not connect to the LDAP server.

By default, it is turned off. It will be automatically turned on, when using the wizard and the configuration is OK and a test connection successful.

**Backup (Replica) Host:** A backup server can be defined here. ownCloud tries to connect to the backup server automatically, when the main host (as specified in basic settings) cannot be reached. It is important that the backup server is a replica of the main server, because the object UUIDs must match.

Example:

- *directory2.my-company.com*

**Backup (Replica) Port:** The port on which to connect to the backup LDAP server. If no port is given, but a host, then the main port (as specified above) will be used.

Example:

- 389

**Disable Main Server:** You can manually override the main server and make ownCloud only connect to the backup server. It may be handy for planned downtimes.

**Case insensitive LDAP server (Windows):** Whether the LDAP server is running on a Windows Host. Usually, it is not necessary to check it, however.

**Turn off SSL certificate validation:** Turns off check of valid SSL certificates. Use it – if needed – for testing, only!

**Cache Time-To-Live:** A cache is introduced to avoid unnecessary LDAP traffic, for example lookups check whether the users exists on every page request or WebDAV interaction. It is also supposed to speed up the Admin → User

page or list of users to share with, once it is populated. Saving the configuration empties the cache (changes are not necessary). The time is given in seconds.

Note that almost every PHP request would require to build up a new connection to the LDAP server. If you require a most up-to-dateness it is recommended not to totally switch off the cache, but define a minimum life time of 15s.

Examples:

- ten minutes: *600*
- one hour: *3600*

## Directory Settings

The screenshot shows the 'Directory Settings' section of the LDAP Advanced Settings. It includes the following fields and values:

- User Display Name Field: `displayname`
- Base User Tree: `dc=owncloud,dc=bzoc`
- User Search Attributes: `Optional; one attribute per line`
- Group Display Name Field: `cn`
- Base Group Tree: `dc=owncloud,dc=bzoc`
- Group Search Attributes: `Optional; one attribute per line`
- Group-Member association: `uniqueMember`

At the bottom, there are buttons for 'Save', 'Test Configuration', and 'Help'.

Figure 3.2: LDAP Advanced Settings, section Directory Settings

**User Display Name Field:** The attribute that should be used as display name in ownCloud.

- Example: *displayName*

**Base User Tree:** The base DN of LDAP, from where all users can be reached. It needs to be given completely despite to the Base DN from the Basic settings. You can specify multiple base trees, one in each line.

- Example:

```
cn=programmers,dc=my-company,dc=com
cn=designers,dc=my-company,dc=com
```

**User Search Attributes:** These attributes are used when a search for users is done. This happens, for instance, in the share dialogue. By default the user display name attribute as specified above is being used. Multiple attributes

can be given, one in each line.

Beware that if an attribute is not available on a user object, the user will neither be listed (e.g. in the share dialogue) nor be able to login. This also affects the display name attribute as specified above. If you override the default, the display name attribute will not be taken into account, unless you specify it as well.

- Example:

```
displayName
mail
```

**Group Display Name Field:** The attribute that should be used as ownCloud group name. ownCloud allows a limited set of characters (a-zA-Z0-9.-\_@), every other character will be replaced in ownCloud. Once a group name is assigned, it will not be changed, i.e. changing this value will only have effect to new LDAP groups.

- Example: *cn*

**Base Group Tree:** The base DN of LDAP, from where all groups can be reached. It needs to be given completely despite to the Base DN from the Basic settings. You can specify multiple base trees, one in each line.

- Example:

```
cn=barcelona,dc=my-company,dc=com
cn=madrid,dc=my-company,dc=com
```

**Group Search Attributes:** These attributes are used when a search for groups is done. This happens, for instance, in the share dialogue. By default the group display name attribute as specified above is being used. Multiple attributes can be given, one in each line.

If you override the default, the group display name attribute will not be taken into account, unless you specify it as well.

- Example:

```
cn
description
```

**Group Member association:** The attribute that is used to indicate group memberships, i.e. the attribute used by LDAP groups to refer to their users.

ownCloud detects the value automatically, you should only change it, if you have a very valid reason and know what you are doing.

- Example: *uniquemember*

### Special Attributes

**Quota Field:** ownCloud can read an LDAP attribute and set the user quota according to its value. Specify the attribute here, otherwise keep it empty. The attribute shall return human readable values, e.g. “2 GB”.

- Example: *ownCloudQuota*

Figure 3.3: LDAP Advanced Settings, section Special Attributes

**Quota Default:** Override ownCloud default quota for LDAP users who do not have a quota set in the attribute given above.

- Example: *15 GB*

**Email Field:** ownCloud can read an LDAP attribute and set the user email there from. Specify the attribute here, otherwise keep it empty.

Although the wizard offers you to check login by email, the correct email attribute is not detected and you need to specify it manually.

- Example: *mail*

**User Home Folder Naming Rule:** By default, the ownCloud creates the user directory, where all files and meta data are kept, according to the ownCloud user name. You may want to override this setting and name it after an attribute value. The attribute given can also return an absolute path, e.g. `/mnt/storage43/alice`. Leave it empty for default behavior.

- Example: *cn*

### 3.3.3 Expert Settings

In the Expert Settings fundamental behavior can be adjusted to your needs. The configuration should be done before starting production use or when testing the installation.

**Internal Username:** The internal username is the identifier in ownCloud for LDAP users. By default it will be created from the UUID attribute. By using the UUID attribute it is made sure that the username is unique and characters do not need to be converted. The internal username has the restriction that only these characters are allowed: `[a-zA-Z0-9_@-]`. Other characters are replaced with their ASCII correspondence or are simply omitted.

The LDAP backend ensures that there are no duplicate internal usernames in ownCloud, i.e. that it is checking all other activated user backends (including local ownCloud users). On collisions a random number (between 1000 and 9999) will be attached to the retrieved value. For example, if “alice” exists, the next username may be “alice\_1337”.

The internal username is also the default name for the user home folder in ownCloud. It is also a part of remote URLs, for instance for all \*DAV services. With this setting the default behaviour can be overridden.

Leave it empty for default behaviour. Changes will have effect only on newly mapped (added) LDAP users.

Server	User Filter	Login Filter	Group Filter	Advanced	Expert
<b>Internal Username</b>					
By default the internal username will be created from the UUID attribute. It makes sure that the username is unique and characters do not need to be converted. The internal username has the restriction that only these characters are allowed: [ a-zA-Z0-9_@- ]. Other characters are replaced with their ASCII correspondence or simply omitted. On collisions a number will be added/increased. The internal username is used to identify a user internally. It is also the default name for the user home folder. It is also a part of remote URLs, for instance for all *DAV services. With this setting, the default behavior can be overridden. To achieve a similar behavior as before ownCloud 5 enter the user display name attribute in the following field. Leave it empty for default behavior. Changes will have effect only on newly mapped (added) LDAP users.					
Internal Username Attribute: <input type="text"/>					
<b>Override UUID detection</b>					
By default, the UUID attribute is automatically detected. The UUID attribute is used to doubtlessly identify LDAP users and groups. Also, the internal username will be created based on the UUID, if not specified otherwise above. You can override the setting and pass an attribute of your choice. You must make sure that the attribute of your choice can be fetched for both users and groups and it is unique. Leave it empty for default behavior. Changes will have effect only on newly mapped (added) LDAP users and groups.					
UUID Attribute for Users: <input type="text"/>					
UUID Attribute for Groups: <input type="text"/>					
<b>Username-LDAP User Mapping</b>					
Usernames are used to store and assign (meta) data. In order to precisely identify and recognize users, each LDAP user will have a internal username. This requires a mapping from username to LDAP user. The created username is mapped to the UUID of the LDAP user. Additionally the DN is cached as well to reduce LDAP interaction, but it is not used for identification. If the DN changes, the changes will be found. The internal username is used all over. Clearing the mappings will have leftovers everywhere. Clearing the mappings is not configuration sensitive, it affects all LDAP configurations! Never clear the mappings in a production environment, only in a testing or experimental stage.					
<input type="button" value="Clear Username-LDAP User Mapping"/>					
<input type="button" value="Clear Groupname-LDAP Group Mapping"/>					
<input type="button" value="Save"/> <input type="button" value="Test Configuration"/> <input type="button" value="Help"/>					

- Example: *uid*

**Override UUID detection** By default, ownCloud auto-detects the UUID attribute. The UUID attribute is used to doubtlessly identify LDAP users and groups. Also, the internal username will be created based on the UUID, if not specified otherwise above.

You can override the setting and pass an attribute of your choice. You must make sure that the attribute of your choice can be fetched for both users and groups and it is unique. Leave it empty for default behaviour. Changes will have effect only on newly mapped (added) LDAP users and groups. It also will have effect when a user's or group's DN changes and an old UUID was cached: It will result in a new user. Because of this, the setting should be applied before putting ownCloud in production use and cleaning the bindings (see below).

- Example: *cn*

**Username-LDAP User Mapping** ownCloud uses the usernames as key to store and assign data. In order to precisely identify and recognize users, each LDAP user will have a internal username in ownCloud. This requires a mapping from ownCloud username to LDAP user. The created username is mapped to the UUID of the LDAP user. Additionally the DN is cached as well to reduce LDAP interaction, but it is not used for identification. If the DN changes, the change will be detected by ownCloud by checking the UUID value.

The same is valid for groups.

The internal ownCloud name is used all over in ownCloud. Clearing the Mappings will have leftovers everywhere. Do never clear the mappings in a production environment. Only clear mappings in a testing or experimental stage.

**Clearing the Mappings is not configuration sensitive, it affects all LDAP configurations!**

### 3.3.4 Testing the configuration

In this version we introduced the **Test Configuration** button on the bottom of the LDAP settings section. It will always check the values as currently given in the input fields. You do not need to save before testing. By clicking on

the button, ownCloud will try to bind to the ownCloud server with the settings currently given in the input fields. The response will look like this:



Figure 3.4: Failure

In case the configuration fails, you can see details in ownCloud's log, which is in the data directory and called **owncloud.log** or on the bottom the **Settings** → **Admin page**. Unfortunately it requires a reload – sorry for the inconvenience.

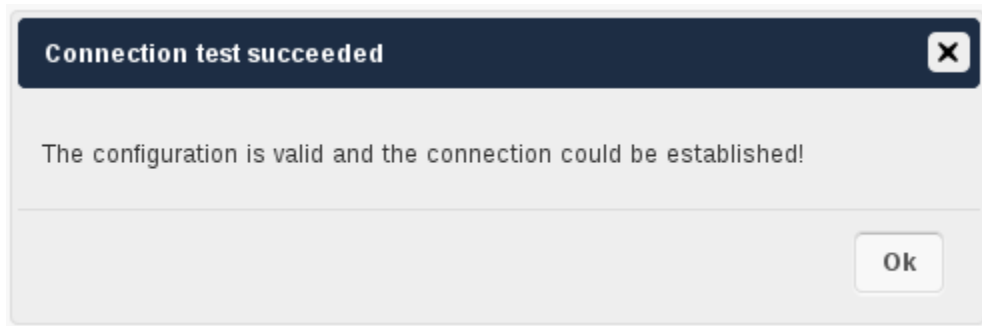


Figure 3.5: Success

In this case, Save the settings. You can check if the users and groups are fetched correctly on the Settings → Users page.

### 3.3.5 ownCloud Avatar integration

ownCloud 6 incorporates a user profile picture feature, called Avatar. If a user has a photo stored in the *jpegPhoto* or, since 6.0.2, *thumbnailPhoto* attribute, it will be used as Avatar. The user then is not able to change his avatar in the personal settings. It must be done within LDAP. *jpegPhoto* is preferred over *thumbnailPhoto*.

If the *jpegPhoto* or *thumbnailPhoto* attribute is not set or empty, the default ownCloud behaviour is active, i.e. the user will be able to set and change his profile picture in the personal settings. If the user sets a profile picture within ownCloud it will *not* be stored in LDAP.

The *jpegPhoto* or *thumbnailPhoto* attribute will be fetched once a day to make sure the current photo from LDAP is used in ownCloud. If a picture is added later, a possibly set profile picture will be overridden with the LDAP one. If a photo stored in the *jpegPhoto* and/or *thumbnailPhoto* attribute is deleted later, the last profile picture in ownCloud will still be used.

The photo taken from LDAP will be adjusted to the requirements of the ownCloud avatar automatically. I.e. it will be transformed into a square. If the photo needs to be cut, it will be done equally from both affected sides. The original photo stored in LDAP will stay the same, of course.

### Profile picture



Your avatar is provided by your original account.

Figure 3.6: Profile picture fetched from LDAP, Personal Settings

## 3.3.6 Troubleshooting, Tips and Tricks

### 3.3.7 SSL Certificate Verification (LDAPS, TLS)

A common mistake with SSL certificates is that they may not be known to PHP. If you have trouble with certificate validation make sure that

- you have the certificate of the server installed on the ownCloud server
- the certificate is announced in the system's LDAP configuration file (usually `/etc/ldap/ldap.conf` on Linux, `C:\openldap\sysconf\ldap.conf` or `C:\ldap.conf` on Windows) using a `TLS_CACERT /path/to/cert` line.
- Using LDAPS, also make sure that the port is correctly configured (by default 686)

### 3.3.8 Microsoft Active Directory

Compared to earlier ownCloud versions, no further tweaks need to be done to make ownCloud work with Active Directory. ownCloud will automatically find the correct configuration in the wizard-like set up process.

### 3.3.9 Duplicating Server Configurations

In case you have a working configuration and want to create a similar one or “snapshot” configurations before modifying them you can do the following:

1. Go to the **Server** tab
2. On **Server Configuration** choose *Add Server Configuration*
3. Answer the question *Take over settings from recent server configuration?* with *yes*.
4. (optional) Switch to **Advanced** tab and uncheck **Configuration Active** in the *Connection Settings*, so the new configuration is not used on Save
5. Click on **Save**

Now you can modify the configuration and enable it if you wish.

### 3.3.10 ownCloud LDAP Internals

Some parts of how the LDAP backend works are described here. May it be helpful.

### 3.3.11 Groups

At the moment, only secondary groups are read. That means that only the groups are retrieved, which are returned by the attribute auto-detected (or manually chosen) in Group-Member association. Primary groups are not being taken into account.

### 3.3.12 User and Group Mapping

In ownCloud the user or group name is used to have all relevant information in the database assigned. To work reliably a permanent internal user name and group name is created and mapped to the LDAP DN and UUID. If the DN changes in LDAP it will be detected, there will be no conflicts.

Those mappings are done in the database table `ldap_user_mapping` and `ldap_group_mapping`. The user name is also used for the user's folder (except something else is specified in *User Home Folder Naming Rule*), which contains files and meta data.

As of ownCloud 5 internal user name and a visible display name are separated. This is not the case for group names, yet, i.e. group cannot be altered.

That means that your LDAP configuration should be good and ready before putting it into production. The mapping tables are filled early, but as long as you are testing, you can empty the tables any time. Do not do this in production. If you want to rename a group, be very careful. Do not rename the user's internal name.

### 3.3.13 Caching

For performance reasons a cache has been introduced to ownCloud. Here we store all users and groups, group memberships or internal userExists-requests. Since ownCloud is written in PHP and each and every page request (also done by Ajax) loads ownCloud and would execute one or more LDAP queries again, you do want to have some of those queries cached and save those requests and traffic. It is highly recommended to have the cache filled for a small amount of time, which comes also very handy when using the sync client, as it is yet another request for PHP.

### 3.3.14 Handling with Backup Server

When ownCloud is not able to contact the main server, he will be treated as offline and no connection attempts will be done for the time specified in **Cache Time-To-Live**. If a backup server is configured, it will be connected instead. If you plan a maintained downtime, check **Disable Main Server** for the time being to avoid unnecessary connection attempts every now and then.

## 3.4 Background Jobs

A system like ownCloud sometimes requires tasks to be done on a regular base without blocking the user interface. For that purpose you, as a system administrator, can define background jobs which make it possible to execute tasks without any need of user interaction, e.g. database clean-ups etc. For the sake of completeness it is worth to know that additionally background jobs can also be defined by installed apps.



### 3.4.1 Parameters

In the admin settings menu you can configure how cron-jobs should be executed. You can choose between the following options:

- AJAX
- Webcron
- Cron

### 3.4.2 Cron-Jobs

OwnCloud requires various automated background jobs to be run. There are three methods to achieve this. The default way is AJAX and the recommended way is cron.

#### AJAX

This option is the default option, although it is the least reliable. Every time a user visits the ownCloud page a single background job will be executed. The advantage of this mechanism is, that it does not require access to the system nor registration at a third party service. The disadvantage of this solution compared to the Webcron service is, that it requires regular visits of the page to get triggered.

#### Webcron

By registering your ownCloud `cron.php` script address at an external webcron service, like e.g. [easyCron](#), you ensure that background jobs will be executed regularly. To use such a service your server needs to be reachable via the Internet.

#### Example

URL to call: `http[s]://<domain-of-your-server>/owncloud/cron.php`

#### Cron

Using the system's cron feature is the preferred way to run regular tasks, because it allows to execute jobs without the limitations which a web server may have.

#### Example

To run a cron job on a \*nix system, e.g. every 15min, under the default web server user, e.g. **www-data**, you need to set-up the following cron job to call the **cron.php** script. Please check the crontab man page for the exact command syntax.

```
# crontab -u www-data -e
*/15 * * * * php -f /var/www/owncloud/cron.php
```

## 3.5 3rd-Party Configuration

ownCloud resorts to some 3rd-party PHP components to provide its functionality. These components are part of the software package and are usually shipped in the **/3rdparty** folder.

### 3.5.1 Parameters

If you want to change the default location of the 3rd-party folder you can use the **3rdpartyroot** parameter to define the absolute file system path to the folder. The **3rdpartyurl** parameter is used to define the http web path to that folder, starting at the ownCloud web root.

```
<?php
"3rdpartyroot" => OC::$SERVERROOT."/3rdparty",
"3rdpartyurl"  => "/3rdparty",
```

## 3.6 Automatic Configuration

If you need to install ownCloud on multiple servers you normally do not want to set-up each instance separately as described in the *Database Configuration*. For this reason the automatic configuration feature has been introduced.

To take advantage of this feature you need to create a configuration file, called `../owncloud/config/autoconfig.php` and set the parameters as required. You can provide all parameters or just part of them - parameters which haven't been provided (if any) will be asked at "Finish setup" screen at first run of ownCloud.

The `../owncloud/config/autoconfig.php` will be automatically removed after the initial configuration has been applied.

### 3.6.1 Parameters

You need to keep in mind that two parameters are named differently in this configuration file compared to the normal `config.php`.

autoconfig.php	config.php
directory	datadirectory
dbpass	dbpassword

### 3.6.2 Sample Automatic Configurations

#### Data Directory

With the configuration below the "Finish setup" screen still will ask for database and admin credentials settings.

```
<?php
$AUTOCONFIG = array(
    "directory"    => "/www/htdocs/owncloud/data",
);
```

#### SQLite Database

With the configuration below the "Finish setup" screen still will ask for data directory and admin credentials settings.

```
<?php
$AUTOCONFIG = array(
    "dbtype"      => "sqlite",
    "dbname"      => "owncloud",
```

```
"dbtableprefix" => "",
);
```

## MySQL Database

Keep in mind that the automatic configuration does not unburden you from creating the database user and database in advance, as described in *Database Configuration*.

With the configuration below the “Finish setup” screen still will ask for data directory and admin credentials settings.

```
<?php
$AUTOCONFIG = array(
    "dbtype"      => "mysql",
    "dbname"      => "owncloud",
    "dbuser"      => "username",
    "dbpass"      => "password",
    "dbhost"      => "localhost",
    "dbtableprefix" => "",
);
```

## PostgreSQL Database

Keep in mind that the automatic configuration does not unburden you from creating the database user and database in advance, as described in *Database Configuration*.

With the configuration below the “Finish setup” screen still will ask for data directory and admin credentials settings.

```
<?php
$AUTOCONFIG = array(
    "dbtype"      => "pgsql",
    "dbname"      => "owncloud",
    "dbuser"      => "username",
    "dbpass"      => "password",
    "dbhost"      => "localhost",
    "dbtableprefix" => "",
);
```

## All Parameters

Keep in mind that the automatic configuration does not unburden you from creating the database user and database in advance, as described in *Database Configuration*.

With the configuration below “Finish setup” will be skipped at first ownCloud run since all parameters are already preconfigured.

```
<?php
$AUTOCONFIG = array(
    "dbtype"      => "mysql",
    "dbname"      => "owncloud",
    "dbuser"      => "username",
    "dbpass"      => "password",
    "dbhost"      => "localhost",
    "dbtableprefix" => "",
    "adminlogin"  => "root",
    "adminpass"   => "root-password",
);
```

```
"directory" => "/www/htdocs/owncloud/data",  
);
```

## 3.7 Custom Client Configuration

If you want to access your ownCloud, you can choose between the standard Web-GUI and different client sync applications. Download links which point to these applications are shown at the top of the personal menu. The following sync applications are currently available out of the box:

- Desktop sync clients for Windows, Mac and Linux OS
- Mobile sync client for Android devices
- Mobile sync client for iOS devices

### 3.7.1 Parameters

If you want to customize the download links for the sync clients the following parameters need to be modified to fulfil your requirements:

```
<?php
```

```
"customclient_desktop" => "http://owncloud.org/sync-clients/",  
"customclient_android" => "https://play.google.com/store/apps/details?id=com.owncloud.android",  
"customclient_ios" => "https://itunes.apple.com/us/app/owncloud/id543672169?mt=8",
```

This parameters can be set in the `config/config.php`

## 3.8 Database Configuration

ownCloud requires a database where administrative data will be held. Four different database types are currently supported, [MySQL](#), [MariaDB](#), [SQLite](#), and [PostgreSQL](#). MySQL or MariaDB are the recommended database engines. By default SQLite is chosen because it is a file based database with the least administrative overhead.

---

**Note:** Because SQLite handles multiple users very badly SQLite is only recommended for single user ownCloud installations

---

### 3.8.1 Requirements

If you decide to use MySQL, MariaDB, or PostgreSQL you need to install and set-up the database first. These steps will not be covered by this description as they are easy to find elsewhere.

### 3.8.2 Parameters

#### MySQL/MariaDB Database

If you decide to use a MySQL or MariaDB database make sure that you have installed and enabled the MySQL extension in PHP and that the `mysql.default_socket` points to the correct socket (if the database runs on same server as ownCloud).

Please note that MariaDB is backwards compatible with MySQL, so all instructions will work for both. You will not need to replace `mysql` with anything.

The PHP configuration in `/etc/php5/conf.d/mysql.ini` could look like this:

```
# configuration for PHP MySQL module
extension=pdo_mysql.so
extension=mysql.so

[mysql]
mysql.allow_local_infile=On
mysql.allow_persistent=On
mysql.cache_size=2000
mysql.max_persistent=-1
mysql.max_links=-1
mysql.default_port=
mysql.default_socket=/var/lib/mysql/mysql.sock # Debian squeeze: /var/run/mysqld/mysqld.sock
mysql.default_host=
mysql.default_user=
mysql.default_password=
mysql.connect_timeout=60
mysql.trace_mode=Off
```

Now you need to create a database user and the database itself by using the MySQL command line interface. The database tables will be created by ownCloud when you login for the first time.

To start the MySQL command line mode use:

```
mysql -uroot -p
```

Then a `mysql>` or `MariaDB [root]>` prompt will appear. Now enter the following lines and confirm them with the enter key:

```
CREATE USER 'username'@'localhost' IDENTIFIED BY 'password';
CREATE DATABASE IF NOT EXISTS owncloud;
GRANT ALL PRIVILEGES ON owncloud.* TO 'username'@'localhost' IDENTIFIED BY 'password';
```

You can quit the prompt by entering:

```
quit
```

In the ownCloud configuration you need to set the hostname on which the database is running and a valid username and password to access it.

```
<?php
```

```
"dbtype"      => "mysql",
"dbname"      => "owncloud",
"dbuser"      => "username",
"dbpassword"  => "password",
"dbhost"      => "localhost",
"dbtableprefix" => "",
```

## SQLite Database

If you decide to use a SQLite database make sure that you have installed and enabled the SQLite extension in PHP. The PHP configuration in `/etc/php5/conf.d/sqlite3.ini` could look like this:

```
# configuration for PHP SQLite3 module
extension=pdo_sqlite.so
extension=sqlite3.so
```

It is not necessary to create a database and a database user in advance because this will automatically be done by ownCloud when you login for the first time.

In the ownCloud configuration in `config/config.php` you need to set at least the **datadirectory** parameter to the directory where your data and database should be stored. Note that for the PDO SQLite driver this directory must be writable (this is recommended for ownCloud anyway). No authentication is required to access the database therefore most of the default parameters could be taken as is:

```
<?php

"dbtype"      => "sqlite",
"dbname"      => "owncloud",
"dbuser"      => "",
"dbpassword"  => "",
"dbhost"      => "",
"dbtableprefix" => "",
"datadirectory" => "/www/htdocs/owncloud/data",
```

### PostgreSQL Database

If you decide to use a PostgreSQL database make sure that you have installed and enabled the PostgreSQL extension in PHP. The PHP configuration in `/etc/php5/conf.d/pgsql.ini` could look like this:

```
# configuration for PHP PostgreSQL module
extension=pdo_pgsql.so
extension=pgsql.so
```

```
[PostgreSQL]
pgsql.allow_persistent = On
pgsql.auto_reset_persistent = Off
pgsql.max_persistent = -1
pgsql.max_links = -1
pgsql.ignore_notice = 0
pgsql.log_notice = 0
```

Now you need to create a database user and the database itself by using the PostgreSQL command line interface. The database tables will be created by ownCloud when you login for the first time.

To start the postgres command line mode use:

```
psql -hlocalhost -Upostgres
```

Then a **postgres=#** prompt will appear. Now enter the following lines and confirm them with the enter key:

```
CREATE USER username WITH PASSWORD 'password';
CREATE DATABASE owncloud TEMPLATE template0 ENCODING 'UNICODE';
ALTER DATABASE owncloud OWNER TO username;
GRANT ALL PRIVILEGES ON DATABASE owncloud TO username;
```

You can quit the prompt by entering:

```
\q
```

In the ownCloud configuration you need to set the hostname on which the database is running and a valid username (and sometimes a password) to access it. If the database has been installed on the same server as ownCloud a password is very often not required to access the database.

```
<?php
"dbtype"      => "pgsql",
"dbname"     => "owncloud",
"dbuser"     => "username",
"dbpassword" => "password",
"dbhost"     => "localhost",
"dbtableprefix" => "",
```

## Oracle Database

If you are deploying to an Oracle database make sure that you have installed and enabled the [Oracle extension](#) in PHP. The PHP configuration in `/etc/php5/conf.d/oci8.ini` could look like this:

```
# configuration for PHP Oracle extension
extension=oci8.so
```

Make sure that the Oracle environment has been set up for the process trying to use the Oracle extension. For a local Oracle XE installation this can be done by exporting the following environment variables (eg. in `/etc/apache2/envvars` for Apache)

```
export ORACLE_HOME=/u01/app/oracle/product/11.2.0/xe
export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:$ORACLE_HOME/lib
```

Installing and configuring Oracle support for PHP is way out of scope for this document. The official Oracle documentation called [The Underground PHP and Oracle Manual](#) should help you through the process.

Creating a database user for ownCloud can be done by using the sqlplus command line interface or the Oracle Application Express web interface. The database tables will be created by ownCloud when you login for the first time.

To start the Oracle command line mode with a DBA account use:

```
sqlplus system AS SYSDBA
```

After entering the password a **SQL>** prompt will appear. Now enter the following lines and confirm them with the enter key:

```
CREATE USER owncloud IDENTIFIED BY password;
ALTER USER owncloud DEFAULT TABLESPACE users
        TEMPORARY TABLESPACE temp
        QUOTA unlimited ON users;
GRANT create session
      , create table
      , create procedure
      , create sequence
      , create trigger
      , create view
      , create synonym
      , alter session
TO owncloud;
```

---

**Note:** In Oracle creating a user is the same as creating a database in other RDBMs, so no `CREATE DATABASE` statement is necessary.

---

You can quit the prompt by entering:

```
exit
```

In the ownCloud configuration you need to set the hostname on which the database is running and a valid username and password to access it. If the database has been installed on the same server as ownCloud to config file could look like this:

```
<?php
```

```
"dbtype"      => "oci",
"dbname"      => "XE",
"dbuser"      => "owncloud",
"dbpassword"  => "password",
"dbhost"      => "localhost",
```

---

**Note:** This example assumes you are running an Oracle Express Edition on localhost. The dbname is the name of the Oracle instance. For Oracle Express Edition it is always XE.

---

### 3.8.3 Trouble Shooting

#### How can I find out if my MySQL/PostgreSQL server is reachable?

Use the ping command to check the server availability:

```
ping db.server.dom
```

```
PING db.server.dom (ip-address) 56(84) bytes of data.
64 bytes from your-server.local.lan (192.168.1.10): icmp_req=1 ttl=64 time=3.64 ms
64 bytes from your-server.local.lan (192.168.1.10): icmp_req=2 ttl=64 time=0.055 ms
64 bytes from your-server.local.lan (192.168.1.10): icmp_req=3 ttl=64 time=0.062 ms
```

#### How can I find out if a created user can access a database?

The easiest way to test if a database can be accessed is by starting the command line interface:

##### SQLite:

```
sqlite3 /www/htdocs/owncloud/data/owncloud.db
```

```
sqlite> .version
SQLite 3.7.15.1 2012-12-19 20:39:10 6b85b767d0ff7975146156a99ad673f2c1a23318
sqlite> .quit
```

##### MySQL:

```
mysql -uUSERNAME -p
```

```
mysql> SHOW VARIABLES LIKE "version";
+-----+-----+
| Variable_name | Value |
+-----+-----+
| version       | 5.1.67 |
+-----+-----+
```



```
1 row in set (0.00 sec)
mysql> quit
```

**PostgreSQL:**

```
psql -Username -downcloud
```

```
postgres=# SELECT version();
PostgreSQL 8.4.12 on i686-pc-linux-gnu, compiled by GCC gcc (GCC) 4.1.3 20080704 (prerelease), 32-bit
(1 row)
postgres=# \q
```

**Oracle:**

```
sqlplus username
```

```
SQL> select * from v$version;
```

```
BANNER
```

```
-----
Oracle Database 11g Express Edition Release 11.2.0.2.0 - 64bit Production
PL/SQL Release 11.2.0.2.0 - Production
CORE 11.2.0.2.0 Production
TNS for Linux: Version 11.2.0.2.0 - Production
NLSRTL Version 11.2.0.2.0 - Production
```

```
SQL> exit
```

**Useful SQL commands****Show Database Users:**

```
SQLite      : No database user is required.
MySQL       : SELECT User,Host FROM mysql.user;
PostgreSQL: SELECT * FROM pg_user;
Oracle      : SELECT * FROM all_users;
```

**Show available Databases:**

```
SQLite      : .databases (normally one database per file!)
MySQL       : SHOW DATABASES;
PostgreSQL: \l
Oracle      : SELECT name FROM v$database; (requires DBA privileges)
```

**Show ownCloud Tables in Database:**

```
SQLite      : .tables
MySQL       : USE owncloud; SHOW TABLES;
PostgreSQL: \c owncloud; \d
Oracle      : SELECT table_name FROM user_tables;
```

**Quit Database:**

```
SQLite      : .quit
MySQL       : quit
PostgreSQL: \q
Oracle      : quit
```

## 3.9 Use Server-Side Encryption

ownCloud ships a encryption app, which allows to encrypt all files stored in your ownCloud. Encryption and decryption always happens server-side. This enables the user to continue to use all the other apps to view and edit his data.

The app uses the user's log-in password as encryption-password. This means that by default the user will lose access to his files if he loses his log-in password.

It might be a good idea to make regular backups of all encryption keys. The encryption keys are stored in following folders:

- data/owncloud\_private\_key (recovery key, if enabled and public share key)
- data/public-keys (public keys from all users)
- data/<user>/files\_encryption (users' private keys and all other keys necessary to decrypt the users' files)

### 3.9.1 Enable File Recovery Feature

The admin can offer the user some kind of protection against password loss. Therefore you have to enable the recovery key in the admin settings and provide a strong recovery key password. The admin settings also enables you to change the recovery key password if you wish. But you should make sure to never lose this password, because that's the only way to recover users' files.

Once the recovery key was enabled every user can choose in his personal settings to enable this feature or not.

### 3.9.2 Recover User Files

If the recovery feature was enabled the admin will see a additional input field at the top of the user management settings. After entering the recovery-key password the admin can change the user's log-in password which will automatically recover the user's file.

If you use a user back-end which doesn't allow you to change the log-in password directly within ownCloud, e.g. the LDAP back-end, than you can follow the same procedure to recover a user's files. The only difference is that you need to change the log-in password additionally at your back-end. In this case make sure to use both times the same password.

### 3.9.3 LDAP and other external user back-ends

if you configure a external user back-end you will be able to change the user's log-in password at the back-end. Since the encryption password must be the same as the user's log-in password this will result in a non-functional encryption system. If the recovery feature was enabled, the administrator will be able to recover the user's files directly over the recovery feature. See the description above. Otherwise the user will be informed that his log-in password and his encryption password no longer matches after his next log-in. In this case the user will be able to adjust his encryption password in the personal settings by providing both, his old and his new log-in password.

## 3.10 Knowledge Base Configuration

The usage of ownCloud is more or less self explaining but nevertheless a user might run into a problem where he needs to consult the documentation or knowledge base. To ease access to the ownCloud documentation and knowledge base, a help menu item is shown in the settings menu by default.

### 3.10.1 Parameters

If you want to disable the ownCloud help menu item you can use the **knowledgebaseenabled** parameter inside the `config/config.php`. The **knowledgebaseurl** parameter is used to set the http path to the ownCloud help page. The server should support OCS.

```
<?php
"knowledgebaseenabled" => true,
"knowledgebaseurl"     => "http://api.apps.owncloud.com/v1",
```

---

**Note:** Disabling the help menu item might increase the number of support request you have to answer in the future

---

## 3.11 Language Configuration

In normal cases ownCloud will automatically detect the language of the Web-GUI. If this doesn't work properly or you want to make sure that ownCloud always starts with a given language, you can use the **default\_language** parameter.

Please keep in mind, that this will not effect a users language preference, which has been configured under “personal -> language” once he has logged in.

Please check `settings/languageCodes.php` for the list of supported language codes.

### 3.11.1 Parameters

```
<?php
"default_language" => "en",
```

This parameters can be set in the `config/config.php`

## 3.12 Logging Configuration

To get an idea of how the current status of an ownCloud system is or to solve issues log information is a good point to start with. ownCloud allows to configure the way how and which depth of information should be logged.

### 3.12.1 Parameters

First you need to decide in which way logging should be done. You can choose between the two options **owncloud** and **syslog**. Then you need to configure the log level which directly influences how much information will be logged. You can choose between:

- 0: DEBUG
- 1: INFO
- 2: WARN
- 3: ERROR

The most detailed information will be written if **0** (DEBUG) is set, the least information will be written if **3** (ERROR) is set. Keep in mind that it might slow down the whole system if a too detailed logging will has been configured. By default the log level is set to **2** (WARN).

This parameters can be set in the `config/config.php`

### ownCloud

All log information will be written to a separate log file which can be viewed using the log menu in the admin menu of ownCloud. By default a log file named **owncloud.log** will be created in the directory which has been configured by the **datadirectory** parameter.

The desired date format can optionally be defined using the **logdateformat**. By default the **PHP date function** parameter **"c"** is used and therefore the date/time is written in the format **"2013-01-10T15:20:25+02:00"**. By using the date format in the example the date/time format will be written in the format **"January 10, 2013 15:20:25"**.

```
<?php
```

```
"log_type" => "owncloud",  
"logfile" => "owncloud.log",  
"loglevel" => "3",  
"logdateformat" => "F d, Y H:i:s",
```

### syslog

All log information will be send to the default syslog daemon of a system.

```
<?php
```

```
"log_type" => "syslog",  
"logfile" => "",  
"loglevel" => "3",
```

## 3.13 Mail Configuration

ownCloud does not contain a full email program but contains some parameters to allow to send e.g. password reset email to the users. This function relies on the **PHPMailer library**. To take advantage of this function it needs to be configured properly.

### 3.13.1 Requirements

Different requirements need to be matched, depending on the environment which you are using and the way how you want to send email. You can choose between **SMTP**, **PHP mail**, **Sendmail** and **qmail**.

### 3.13.2 Parameters

All parameters need to be set in `config/config.php`

## SMTP

If you want to send email using a local or remote SMTP server it is necessary to enter the name or ip address of the server, optionally followed by a colon separated port number, e.g. **:425**. If this value is not given the default port 25/tcp will be used unless you will change that by modifying the **mail\_smtpport** parameter. Multiple server can be entered separated by semicolon:

```
<?php
```

```
"mail_smtpmode"    => "smtp",
"mail_smtpghost"   => "smtp-1.server.dom;smtp-2.server.dom:425",
"mail_smtpport"    => 25,
```

or

```
<?php
```

```
"mail_smtpmode"    => "smtp",
"mail_smtpghost"   => "smtp.server.dom",
"mail_smtpport"    => 425,
```

If a malware or SPAM scanner is running on the SMTP server it might be necessary that you increase the SMTP timeout to e.g. 30s:

```
<?php
```

```
"mail_smtptimeout" => 30,
```

If the SMTP server accepts insecure connections, the default setting can be used:

```
<?php
```

```
"mail_smtpsecure"  => '',
```

If the SMTP server only accepts secure connections you can choose between the following two variants:

## SSL

A secure connection will be initiated using the outdated SMTPS protocol which uses the port 465/tcp:

```
<?php
```

```
"mail_smtpghost"   => "smtp.server.dom:465",
"mail_smtpsecure"  => 'ssl',
```

## TLS

A secure connection will be initiated using the STARTTLS protocol which uses the default port 25/tcp:

```
<?php
```

```
"mail_smtpghost"   => "smtp.server.dom",
"mail_smtpsecure"  => 'tls',
```

And finally it is necessary to configure if the SMTP server requires authentication, if not, the default values can be taken as it.

```
<?php
```

```
"mail_smtpauth"    => false,  
"mail_smtpname"    => "",  
"mail_smtppassword" => "",
```

If SMTP authentication is required you have to set the required username and password and can optionally choose between the authentication types **LOGIN** (default) or **PLAIN**.

```
<?php
```

```
"mail_smtpauth"    => true,  
"mail_smtpauthtype" => "LOGIN",  
"mail_smtpname"    => "username",  
"mail_smtppassword" => "password",
```

## PHP mail

If you want to use PHP mail it is necessary to have an installed and working email system on your server. Which program in detail is used to send email is defined by the configuration settings in the **php.ini** file. (On \*nix systems this will most likely be Sendmail.) ownCloud should be able to send email out of the box.

```
<?php
```

```
"mail_smtpmode"    => "php",  
"mail_smtphost"    => "127.0.0.1",  
"mail_smtpport"    => 25,  
"mail_smtptimeout" => 10,  
"mail_smtpsecure"  => "",  
"mail_smtpauth"    => false,  
"mail_smtpauthtype" => "LOGIN",  
"mail_smtpname"    => "",  
"mail_smtppassword" => "",
```

## Sendmail

If you want to use the well known Sendmail program to send email, it is necessary to have an installed and working email system on your \*nix server. The sendmail binary (**/usr/sbin/sendmail**) is usually part of that system. ownCloud should be able to send email out of the box.

```
<?php
```

```
"mail_smtpmode"    => "sendmail",  
"mail_smtphost"    => "127.0.0.1",  
"mail_smtpport"    => 25,  
"mail_smtptimeout" => 10,  
"mail_smtpsecure"  => "",  
"mail_smtpauth"    => false,  
"mail_smtpauthtype" => "LOGIN",  
"mail_smtpname"    => "",  
"mail_smtppassword" => "",
```

## qmail

If you want to use the qmail program to send email, it is necessary to have an installed and working qmail email system on your server. The sendmail binary (`/var/qmail/bin/sendmail`) will then be used to send email. ownCloud should be able to send email out of the box.

```
<?php
```

```
"mail_smtpmode" => "qmail",
"mail_smtphost" => "127.0.0.1",
"mail_smtpport" => 25,
"mail_smtptimeout" => 10,
"mail_smtpsecure" => "",
"mail_smtpauth" => false,
"mail_smtpauthtype" => "LOGIN",
"mail_smtptimeout" => "",
"mail_smtppassword" => "",
```

### 3.13.3 Send a Test Email

The only way to test your email configuration is, to force a login failure, because a function to send a test email has not been implemented yet.

First make sure that you are using a full qualified domain and not an ip address in the ownCloud URL, like:

```
http://my-owncloud-server.domain.dom/owncloud/
```

The password reset function fetches the domain name from that URL to build the email sender address, e.g.:

```
john@domain.dom
```

Next you need to enter your login and an *invalid* password. As soon as you press the login button the login mask reappears and a **I've forgotten my password** link will be shown above the login field. Click on that link, re-enter your login and press the **Reset password** button - that's all.

### 3.13.4 Trouble shooting

#### My web domain is different from my mail domain?

The default domain name used for the sender address is the hostname where your ownCloud installation is served. If you have a different mail domain name you can override this behavior by setting the following configuration parameter:

```
<?php
```

```
"mail_domain" => "example.com",
```

Now every mail sent by ownCloud e.g. password reset email, will have the domain part of the sender address look like:

```
no-reply@example.com
```

#### How can I find out if a SMTP server is reachable?

Use the ping command to check the server availability:

```
ping smtp.server.dom
```

```
PING smtp.server.dom (ip-address) 56(84) bytes of data.  
64 bytes from your-server.local.lan (192.168.1.10): icmp_req=1 ttl=64 time=3.64 ms  
64 bytes from your-server.local.lan (192.168.1.10): icmp_req=2 ttl=64 time=0.055 ms  
64 bytes from your-server.local.lan (192.168.1.10): icmp_req=3 ttl=64 time=0.062 ms
```

### How can I find out if the SMTP server is listening on a specific tcp port?

A SMTP server is usually listening on port **25/tcp** (smtp) and/or in rare circumstances is also listening on the outdated port **465/tcp** (smtps). You can use the telnet command to check if a port is available:

```
telnet smtp.domain.dom 25  
  
Trying 192.168.1.10...  
Connected to smtp.domain.dom.  
Escape character is '^]'.  
220 smtp.domain.dom ESMTP Exim 4.80.1 Tue, 22 Jan 2013 22:28:14 +0100
```

### How can I find out if a SMTP server supports the outdated SMTPS protocol?

A good indication that a SMTP server supports the SMTPS protocol is that it is listening on port **465/tcp**. How this can be checked has been described previously.

### How can I find out if a SMTP server supports the TLS protocol?

A SMTP server usually announces the availability of STARTTLS right after a connection has been established. This can easily be checked with the telnet command. You need to enter the marked lines to get the information displayed:

```
telnet smtp.domain.dom 25  
  
Trying 192.168.1.10...  
Connected to smtp.domain.dom.  
Escape character is '^]'.  
220 smtp.domain.dom ESMTP Exim 4.80.1 Tue, 22 Jan 2013 22:39:55 +0100  
EHLO your-server.local.lan # <<< enter this command  
250-smtp.domain.dom Hello your-server.local.lan [ip-address]  
250-SIZE 52428800  
250-8BITMIME  
250-PIPELINING  
250-AUTH PLAIN LOGIN CRAM-MD5  
250-STARTTLS # <<< STARTTLS is supported!  
250 HELP # <<< enter this command  
QUIT  
221 smtp.domain.dom closing connection  
Connection closed by foreign host.
```

### How can I find out which authentication types/methods a SMTP server supports?

A SMTP server usually announces the available authentication types/methods right after a connection has been established. This can easily be checked with the telnet command. You need to enter the marked lines to get the information displayed:



```
telnet smtp.domain.dom 25

Trying 192.168.1.10...
Connected to smtp.domain.dom.
Escape character is '^]'.
220 smtp.domain.dom ESMTP Exim 4.80.1 Tue, 22 Jan 2013 22:39:55 +0100
EHLO your-server.local.lan # <<< enter this command
250-smtp.domain.dom Hello your-server.local.lan [ip-address]
250-SIZE 52428800
250-8BITMIME
250-PIPELINING
250-AUTH PLAIN LOGIN CRAM-MD5 # <<< available Authentication
250-STARTTLS
250 HELP
QUIT # <<< enter this command
221 smtp.domain.dom closing connection
Connection closed by foreign host.
```

## Enable Debug Mode

If you are still not able to send email it might be useful to activate further debug messages by setting the following parameter. Right after you have pressed the **Reset password** button, as described before, a lot of **SMTP -> get\_lines(): ...** messages will be written on the screen.

```
<?php
```

```
"mail_smtpdebug" => true;
```

## 3.14 Maintenance Mode Configuration

If you want to prevent users to login to ownCloud before you start doing some maintenance work, you need to set the value of the **maintenance** parameter to *true*. Please keep in mind that users who are already logged-in are kicked out of ownCloud instantly.

### 3.14.1 Parameters

```
<?php
```

```
"maintenance" => false,
```

This parameters can be set in the `config/config.php`

## 3.15 Preview Configuration

ownCloud 6 introduced the new thumbnail system. It is used to generate thumbnails from various file types. By default, it can generate previews for:

- Images
- Movies
- Cover from mp3 files

- various office files
- Pdf
- Svg
- Text

### 3.15.1 Soft dependencies:

#### imagick:

ownCloud needs the imagick php extension to generate previews from office, pdf and svg files. For further information on how to install the imagick php extension on your system take a look at the [PHP documentation](#). If imagick is not installed, ownCloud will show file type icons instead of previews.

#### LibreOffice / OpenOffice:

ownCloud comes with a php-only preview system for office files. But this preview system has limited capabilities and is only able to create previews from basic Microsoft Office files. If you need previews from advanced Microsoft Office files or OpenDocument files, you have to install LibreOffice or OpenOffice. To learn more about installing LibreOffice/OpenOffice consider your distribution's documentation.

#### avconv / ffmpeg:

ownCloud requires avconv or ffmpeg to generate previews from movies. To learn more about installing avconv or ffmpeg consider your distribution's documentation.

### 3.15.2 Parameters

#### Disabling previews:

Under certain circumstances like a big user base or limited resources you might want to consider disabling previews.

```
<?php
    'enable_previews' => true,
```

There is a config option called 'enable\_previews'. By default it's set to true. You can disable previews by setting this option to false:

```
<?php
    'enable_previews' => false,
```

#### Maximum preview size:

There are two config options to set the maximum size of a preview.

```
<?php
    'preview_max_x' => null,
    'preview_max_y' => null,
```

By default, both config options are set to null. 'Null' is equal to no limit. Numeric values represent the size in pixel. The following code limits previews to a maximum size of 100px by 100px:

```
<?php
'preview_max_x' => 100,
'preview_max_y' => 100,
```

'preview\_max\_x' represents the x-axis and 'preview\_max\_y' represents the y-axis.

### Maximum scale factor:

If you have a lot of small pictures and the preview system generates blurry previews, you might want to consider setting a maximum scale factor. By default, ownCloud scales pictures up to 10 times the original size:

```
<?php
'preview_max_scale_factor' => 10,
```

If you want to disable scaling at all, you can set the config value to '1':

```
<?php
'preview_max_scale_factor' => 1,
```

If you want to disable the maximum scaling factor, you can set the config value to 'null':

```
<?php
'preview_max_scale_factor' => null,
```

### LibreOffice / OpenOffice:

You can set a custom path for the LibreOffice binary. If LibreOffice is not yet available on your system, you can also use OpenOffice instead.

```
<?php
'preview_libreoffice_path' => '/usr/bin/libreoffice',
```

You can set custom LibreOffice / OpenOffice command line parameters by setting the `preview_office_cl_parameters` option.

```
<?php
'preview_office_cl_parameters' => ' ',
```

## 3.16 Reverse Proxy Configuration

The automatic hostname, protocol or webroot detection of ownCloud can fail in certain reverse proxy situations. This configuration allows to manually override the automatic detection.

### 3.16.1 Parameters

If ownCloud fails to automatically detected the hostname, protocol or webroot you can use the **override** parameters inside the `config/config.php`. The **overwritehost** parameter is used to set the hostname of the proxy. You can also specify a port. The **overwriteprotocol** parameter is used to set the protocol of the proxy. You can choose between the two options **http** and **https**. The **overwritewebroot** parameter is used to set the absolute web path of the proxy to the ownCloud folder. When you want to keep the automatic detection of one of the three parameters you can leave the value empty or don't set it. The **overwritecondaddr** parameter is used to overwrite the values dependent on the remote address. The value must be a **regular expression** of the IP addresses of the proxy. This is useful when you use a reverse SSL proxy only for https access and you want to use the automatic detection for http access.

## 3.16.2 Example

### Multiple Domains Reverse SSL Proxy

If you want to access your ownCloud installation <http://domain.tld/owncloud> via a multiple domains reverse SSL proxy <https://ssl-proxy.tld/domain.tld/owncloud> with the IP address **10.0.0.1** you can set the following parameters inside the `config/config.php`.

```
<?php
$CONFIG = array (
    "overwritehost" => "ssl-proxy.tld",
    "overwriteprotocol" => "https",
    "overwritewebroot" => "/domain.tld/owncloud",
    "overwritecondaddr" => "^10\.0\.0\.1$",
);
```

---

**Note:** If you want to use the SSL proxy during installation you have to create the `config/config.php` otherwise you have to extend to existing `$CONFIG` array.

---

## 3.17 Uploading big files > 512MB (as set by default)

It's usefull to know limiting factors, that make it impossible to exceed the values given by the ownCloud-system:

### 3.17.1 Not outnumberable upload limits:

- < 2GB on 32Bit OS-architecture
- < 2GB with Server Version 4.5 or older
- < 2GB with IE6 - IE8
- < 4GB with IE9 - IE10

### 3.17.2 Other recommendable preconditions:

- Make sure, that the latest version of php (at least 5.4.9) is installed
- Disable user quota. This means: set the user quota of the account, you are currently logged in, to "unlimited".

This is important, because you possibly could not watch otherwise, whether the desired changes take effect.

## 3.18 Enabling uploading big files

Note: The order of the following steps is important! If you swap steps described below, the settings may fail.

**Go to the admin section in the ownCloud-WebUI and do the following:**

- Under "File handling" set the Maximum upload size to the desired value (e.g. 16GB)
- Click the "save"-Button

**Open the `php.ini` - file**

- Under Debian or SUSE and their derivatives this file lies at `/etc/php5/apache2/php.ini`
- On Windows, you can find this file within `C:/Program Files (x86)/PHP/PHP.ini`

**Do the following:**

- Set the following three parameters inside the `php.ini` to the same value as chosen inside the admin-section one step before:
- `upload_max_filesize = 16G` (e.g., to stay consistent with the example value above)
- `post_max_size = 16G` (e.g., to stay consistent with the example value above)
- `output_buffering = 16384` (e.g., to stay consistent with the example value above)

whereas the “`output_buffering`” has to be given in MegaBytes but as a plain figure (without size-units as ‘M’ or ‘G’)

These client configurations have been proven by testing maximum file sizes of 16 GB:

- Linux 32 Bit: Ubuntu, Firefox => 16GB
- Windows 8 64 Bit: Google Chrome => 8GB

## 3.19 Custom Mount Configuration Web-GUI

Since ownCloud 5.0 it is possible to mount external storage providers into ownCloud’s virtual file system. To add an external storage backend to your ownCloud head to *Settings -> Admin* or *Personal*. As administrator you can mount external storage for any group or user. Users are also allowed to mount external storage for themselves if this setting has been enabled by the administrator.

Mount point	Backend	Configuration	Applicable
AmazonS3	Amazon S3	*****	admin x
Mount point	Add mount point ▼		

Enable User External Storage  
Allow users to mount their own external storage

At first the mount point has to be entered, this is the directory in ownCloud’s virtual file system, that the storage will be mounted to. Then the storage backend has to be selected from the list of supported backends. As of writing ownCloud currently supports the following storage backends:

FTP Add mount point ▼

- Local file system (mount local storage that is outside ownCloud’s data directory)
- FTP (or FTPS)
- SFTP
- SMB
- WebDAV
- Amazon S3
- Dropbox

- Google Drive
- OpenStack Swift

Please keep in mind, that users are not allowed to mount local file storage for security purposes.

The image shows two screenshots of the ownCloud configuration interface for FTP storage. The top screenshot shows the initial configuration with fields for FTP, URL, Username, Password, Root, Secure ftps://, and None set. The bottom screenshot shows the configuration after selecting a backend, with fields for FTP, URL (ftp.gapinthecloud.com), Username (ftp@gapinthecloud.co), Password (masked), Root, Secure ftps:// (checked), and MTGap x.

Once a backend has been selected, more configuration fields will appear. The displayed configuration fields may vary depending on the selected storage backend. For example, the FTP storage backend needs the following configuration details to be entered:

- **host:** the hostname of the ftp server
- **user:** the username used to login to the ftp server
- **password:** the password to login to the ftp server
- **secure:** whether to use ftps:// (FTP over TLS) to connect to the ftp server instead of ftp:// (optional, defaults to false)
- **root:** the name of the folder inside the ftp server to mount (optional, defaults to '/')

### 3.19.1 Dropbox

Mounting a Dropbox account requires that you create an app with Dropbox and then provide the app key and secret to the external storage configuration user interface. Go to My apps at Dropbox and create an app. Select *Full Dropbox* access level. Copy the app key and app secret and paste them into the corresponding fields for the Dropbox storage.

Click the *Grant access* button and you will be redirected to a Dropbox website to give ownCloud permission to access your account.

### 3.19.2 Google Drive

For a detailed step-by-step guide read User Manual

## 3.20 Custom Mount Configuration

Since ownCloud 4.0 it is possible to configure the filesystem to mount external storage providers into ownCloud's virtual file system. You can configure these file systems by creating and editing `data/mount.json`. This file contains all settings in JSON (JavaScript Object Notation) format. At the moment two different types of entries exist:

- **Group mounts:** each entry configures a mount for each user in group.
- **User mounts:** each entry configures a mount for a single user or for all users.

For each type, there is a JSON array with the user/group name as key, and an array of configuration entries as value. Each entry consist of the class name of the storage backend and an array of backend specific options and will be replaced by the user login. The template `$user` can be used in the mount point or backend options. As of writing the following storage backends are available for use:

- Local file system

- FTP (or FTPS)
- SFTP
- SMB
- WebDAV
- Amazon S3
- Dropbox
- Google Drive
- OpenStack Swift

Please keep in mind that some formatting has been applied and carriage returns have been added for better readability. In the `data/mount.json` all values need to be concatenated and written in a row without these modifications!

It is recommended to use the *Web-GUI* in the administrator panel to add, remove or modify mount options to prevent any problems!

### 3.20.1 Example

```
{ "group": {
  "admin": {
    "\/$user\/files\/Admin_Stuff": {
      "class": "\\OC\\Files\\Storage\\Local",
      "options": { ... }
    }
  }
}
"user": {
  "all": {
    "\/$user\/files\/Pictures": {
      "class": "\\OC\\Files\\Storage\\DAV",
      "options": { ... }
    }
  }
  "someuser": {
    "\/someuser\/files\/Music": {
      "class": "\\OC\\Files\\Storage\\FTP",
      "options": { ... }
    }
  }
}
}
```

### 3.20.2 Backends

#### Local Filesystem

The local filesystem backend mounts a folder on the server into the virtual filesystem, the class to be used is `\OCFilesStorageLocal` and takes the following options:

- **datadir** : the path to the local directory to be mounted

### Example

```
{ "class": "\\OC\\Files\\Storage\\Local",  
  "options": { "datadir": "\/mnt\/additional_storage" }  
}
```

---

**Note:** You must ensure that the web server has sufficient permissions on the folder.

---

### FTP (or FTPS)

The FTP backend mounts a folder on a remote FTP server into the virtual filesystem and is part of the ‘External storage support’ app, the class to be used is `\OC\Files\Storage\FTP` and takes the following options:

- **host:** the hostname of the ftp server
- **user:** the username used to login on the ftp server
- **password:** the password to login on the ftp server
- **secure:** whether to use ftps:// (FTP over TLS) to connect to the ftp server instead of ftp:// (optional, defaults to false)
- **root:** the folder inside the ftp server to mount (optional, defaults to '/')

### Example

```
{ "class": "\\OC\\Files\\Storage\\FTP",  
  "options": {  
    "host": "ftp.myhost.com",  
    "user": "johndoe",  
    "password": "secret",  
    "root": "\/Videos",  
    "secure": "false"  
  }  
}
```

---

**Note:** PHP needs to be build with FTP support for this backend to work.

---

### SFTP

The SFTP backend mounts a folder on a remote SSH server into the virtual filesystem and is part of the ‘External storage support’ app. The class to be used is `\OC\Files\Storage\SFTP` and takes the following options:

- **host:** the hostname of the SSH server
- **user:** the username used to login to the SSH server
- **password:** the password to login on the SSH server
- **root:** the folder inside the SSH server to mount (optional, defaults to '/')



### Example

```
{
  "class": "\\OC\\Files\\Storage\\SFTP",
  "options": {
    "host": "ssh.myhost.com",
    "user": "johndoe",
    "password": "secret",
    "root": "\\Books"
  }
}
```

---

**Note:** PHP needs to be build with SFTP support for this backend to work.

---

### SMB

The SMB backend mounts a folder on a remote Samba server, a NAS appliance or a Windows machine into the virtual file system. It is part of the 'External storage support' app, the class to be used is `\\OC\\Files\\Storage\\SMB` and takes the following options:

- **host:** the host name of the samba server
- **user:** the user name used to login on the samba server
- **password:** the password to login on the samba server
- **share:** the share on the samba server to mount
- **root:** the folder inside the samba share to mount (optional, defaults to '/')

---

**Note:** The SMB backend requires **smbclient** to be installed on the server.

---

### Example

```
{
  "class": "\\OC\\Files\\Storage\\SMB",
  "options": {
    "host": "myhost.com",
    "user": "johndoe",
    "password": "secret",
    "share": "\\test",
    "root": "\\Pictures"
  }
}
```

### WebDAV

The WebDAV backend mounts a folder on a remote WebDAV server into the virtual filesystem and is part of the 'External storage support' app, the class to be used is `\\OC\\Files\\Storage\\DAV` and takes the following options:

- **host:** the hostname of the webdav server.
- **user:** the username used to login on the webdav server
- **password:** the password to login on the webdav server

- **secure**: whether to use <https://> to connect to the webdav server instead of <http://> (optional, defaults to false)
- **root**: the folder inside the webdav server to mount (optional, defaults to '/')

#### Example

```
{  "class": "\\OC\\Files\\Storage\\DAV",  "options": {    "host": "myhost.com/webdav.php",    "user": "johndoe",    "password": "secret",    "secure": "true"  } }
```

### Amazon S3

The Amazon S3 backend mounts a bucket in the Amazon cloud into the virtual filesystem and is part of the 'External storage support' app, the class to be used is `\\OC\\Files\\Storage\\AmazonS3` and takes the following options:

- **key**: the key to login to the Amazon cloud
- **secret**: the secret to login to the Amazon cloud
- **bucket**: the bucket in the Amazon cloud to mount

#### Example

```
{  "class": "\\OC\\Files\\Storage\\AmazonS3",  "options": {    "key": "key",    "secret": "secret",    "bucket": "bucket"  } }
```

### Dropbox

The Dropbox backend mounts a dropbox in the Dropbox cloud into the virtual filesystem and is part of the 'External storage support' app, the class to be used is `\\OC\\Files\\Storage\\Dropbox` and takes the following options:

- **configured**: whether the drive has been configured or not (true or false)
- **app\_key**: the app key to login to your Dropbox
- **app\_secret**: the app secret to login to your Dropbox
- **token**: the OAuth token to login to your Dropbox
- **token\_secret**: the OAuth secret to login to your Dropbox

#### Example

```
{
  "class": "\\OC\\Files\\Storage\\Dropbox",
  "options": {
    "configured": "#configured",
    "app_key": "key",
    "app_secret": "secret",
    "token": "#token",
    "token_secret": "#token_secret"
  }
}
```

## Google Drive

The Google Drive backend mounts a share in the Google cloud into the virtual filesystem and is part of the ‘External storage support’ app, the class to be used is `\\OC\\Files\\Storage\\Google` and is done via an OAuth2.0 request. That means that the App must be registered through the Google APIs Console. The result of the registration process is a set of values (incl. `client_id`, `client_secret`). It takes the following options:

- **configured**: whether the drive has been configured or not (true or false)
- **client\_id**: the client id to login to the Google drive
- **client\_secret**: the client secret to login to the Google drive
- **token**: a compound value including access and refresh tokens

### Example

```
{
  "class": "\\OC\\Files\\Storage\\Google",
  "options": {
    "configured": "#configured",
    "client_id": "#client_id",
    "client_secret": "#client_secret",
    "token": "#token"
  }
}
```

## OpenStack Swift

The Swift backend mounts a container on an OpenStack Object Storage server into the virtual filesystem and is part of the ‘External storage support’ app, the class to be used is `\\OC\\Files\\Storage\\SWIFT` and takes the following options:

- **host**: the hostname of the authentication server for the swift storage.
- **user**: the username used to login on the swift server
- **token**: the authentication token to login on the swift server
- **secure**: whether to use `ftps://` to connect to the swift server instead of `ftp://` (optional, defaults to false)
- **root**: the container inside the swift server to mount (optional, defaults to `/`)

### Example

```
{  "class": "\\OC\\Files\\Storage\\SWIFT",
  "options": {
    "host": "swift.myhost.com\\auth",
    "user": "johndoe",
    "token": "secret",
    "root": "\\Videos",
    "secure": "true"
  }
}
```

## 3.21 Custom User Backend Configuration

Starting with ownCloud 4.5 it is possible to configure additional user backends in ownCloud's configuration `config/config.php` using the following syntax:

```
<?php

"user_backends" => array (
  0 => array (
    "class"      => ...,
    "arguments" => array (
      0 => ...
    ),
  ),
),
```

Currently the “External user support” (`user_external`) app provides the following user backends:

### 3.21.1 IMAP

Provides authentication against IMAP servers

- **Class:** `OC_User_IMAP`
- **Arguments:** a mailbox string as defined in the PHP documentation
- **Example:**

```
<?php

"user_backends" => array (
  0 => array (
    "class"      => "OC_User_IMAP",
    "arguments" => array (
      0 => '{imap.gmail.com:993/imap/ssl}'
    ),
  ),
),
```

### 3.21.2 SMB

Provides authentication against Samba servers

- **Class:** `OC_User_SMB`

- **Arguments:** the samba server to authenticate against
- **Example:**

```
<?php
"user_backends" => array (
  0 => array (
    "class"      => "OC_User_SMB",
    "arguments" => array (
      0 => 'localhost'
    ),
  ),
),
```

## FTP

Provides authentication against FTP servers

- **Class:** OC\_User\_FTP
- **Arguments:** the FTP server to authenticate against
- **Example:**

```
<?php
"user_backends" => array (
  0 => array (
    "class"      => "OC_User_FTP",
    "arguments" => array (
      0 => 'localhost'
    ),
  ),
),
```

## 3.22 Serving static files via web server

Since ownCloud 5 it is possible to let web servers handle static file serving. This should generally improve performance (web servers are optimized for this) and in some cases permits controlled file serving (i.e. pause and resume downloads).

---

**Note:** This feature can currently only be activated for local files, i.e. files inside the **data/** directory

---

and local mounts. Controlled file serving **does not work for generated zip files**. This is due to how temporary files are created.

### 3.22.1 Apache2 (X-Sendfile)

It is possible to let Apache handle static file serving via `mod_xsendfile`.

## Installation

On Debian and Ubuntu systems use:

```
apt-get install libapache2-mod-xsendfile
```

## Configuration

Configuration of `mod_xsendfile` for ownCloud depends on its version. For versions below 0.10 (Debian squeeze ships with 0.9)

```
<Directory /var/www/owncloud>
...
SetEnv MOD_X_SENDFILE_ENABLED 1
XSendFile On
XSendFileAllowAbove On
</Directory>
```

For versions  $\geq 0.10$  (e.g. Ubuntu 12.10)

```
<Directory /var/www/owncloud>
...
SetEnv MOD_X_SENDFILE_ENABLED 1
XSendFile On
XSendFilePath /tmp/oc-noclean
XSendFilePath /home/valerio
</Directory>
```

- **SetEnv MOD\_X\_SENDFILE\_ENABLED:** tells ownCloud scripts that they should add the X-Sendfile header when serving files
- **XSendFile:** enables web server handling of X-Sendfile headers (and therefore file serving) for the specified Directory
- **XSendFileAllowAbove (<0.10):** enables file serving through web server on path outside the specified Directory. This is needed for PHP temporary directory where zip files are created and for configured local mounts which may reside outside data directory
- **XSendFilePath ( $\geq 0.10$ ):** a white list of paths that the web server is allowed to serve outside of the specified Directory. At least PHP temporary directory concatenated with *oc-noclean* must be configured. Temporary zip files will be created inside this directory when using `mod_xsendfile`. Other paths which correspond to local mounts should be configured here as well. For a more in-dept documentation of this directive refer to `mod_xsendfile` website linked above

### 3.22.2 LigHTTPd (X-Sendfile2)

LigHTTPd uses similar headers to Apache2, apart from the fact that it does not handle partial downloads in the same way Apache2 does. For this reason, a different method is used for LigHTTPd.

## Installation

X-Sendfile and X-Sendfile2 are supported by default in LigHTTPd and no additional operation should be needed to install it.

## Configuration

Your server configuration should include the following statements:

```
fastcgi.server          = ( ".php" => ((
    ...
    "allow-x-send-file" => "enable",
    "bin-environment" => (
        "MOD_X_SENDFILE2_ENABLED" => "1",
    ),
)),
)))
```

- **allow-x-send-file:** enables LigHTTPd to use X-Sendfile and X-Sendfile2 headers to serve files
- **bin-environment:** is used to parse MOD\_X\_SENDFILE2\_ENABLED to the ownCloud backend, to make it use the X-Sendfile and X-Sendfile2 headers in it's response

### 3.22.3 Nginx (X-Accel-Redirect)

Nginx supports handling of static files differently from Apache. Documentation can be found in the Nginx Wiki section [Mod X-Sendfile](#) and section [X-Accell](#). The header used by Nginx is X-Accel-Redirect.

## Installation

X-Accel-Redirect is supported by default in Nginx and no additional operation should be needed to install it.

## Configuration

Configuration is similar to Apache:

```
location ~ /\.php$ {
    ...
    fastcgi_param MOD_X_ACCEL_REDIRECT_ENABLED on;
}

location ~ ^/home/valerio/(owncloud/)?data {
    internal;
    root /;
}

location ~ ^/tmp/oc-noclean/.*$ {
    internal;
    root /;
}
```

- **fastcgi\_param MOD\_X\_ACCEL\_REDIRECT\_ENABLED:** tells ownCloud scripts that they should add the X-Accel-Redirect header when serving files
- **internal location:** each directory that contains local user data should correspond to an internal location. In the example uses the following directories:
  - **/home/valerio/owncloud/data:** ownCloud data directory
  - **/home/valerio/data:** a local mount
  - **/tmp/oc-noclean:** PHP temporary directory concatenated with *oc-noclean*. Temporary zip files will be created inside this directory when using X-Accel-Redirect

### 3.22.4 How to check if it's working?

You are still able to download stuff via the web interface and single, local file downloads can be paused and resumed.



# MAINTENANCE

## 4.1 Backing up ownCloud

To backup an ownCloud installation there are three main things you need to retain:

1. The config folder
2. The data folder
3. The database

### 4.1.1 Backup Folders

Simply copy your config and data folder (or even your whole ownCloud install and data folder) to a place outside of your ownCloud environment. You could use this command:

```
rsync -Aax owncloud/ owncloud-dirbkp_`date +%Y%m%d` \/
```

### 4.1.2 Backup Database

#### MySQL

MySQL is the recommended database engine. To backup MySQL:

```
mysqldump --lock-tables -h [server] -u [username] -p[password] > owncloud-sqlbkp_`date +%Y%m%d` \.bak
```

#### SQLite

```
sqlite3 data/owncloud.db .dump > owncloud-sqlbkp_`date +%Y%m%d` \.bak
```

#### PostgreSQL

```
PGPASSWORD="password" pg_dump owncloud -h [server] -U [username] -f owncloud-sqlbkp_`date +%Y%m%d` \
```

## 4.2 Updating ownCloud

---

**Note:** If you have installed ownCloud from a repository, your package management should take care of it. Probably you will need to look for compatible third party applications yourself. **Always do backups anyway.**

---

### 4.2.1 Update

Updating means updating ownCloud to the latest *point release*, e.g. ownCloud 5.0.13 → 5.0.14a. This procedure uses the ownCloud updater plugin called “Updater”: it’s an internal application already present in your ownCloud installation.

To update ownCloud, follow those steps:

1. Make a backup of the ownCloud folder and the database.
2. Make sure that updater plugin is enabled.
3. Navigate to the ‘Admin’ page.
4. Click ‘Update’.
5. Refresh the page with Ctrl+F5.

If this procedure doesn’t work (for example, ownCloud 5.0.10 doesn’t show new any new version) you could try to perform a full upgrade to update to the latest point release (see below).

### 4.2.2 Upgrade

Upgrade is to bring an ownCloud instance to a new *major release*, e.g. ownCloud 5.0.14a → 6.0.2. Always do backups anyway.

To upgrade ownCloud, follow those steps:

1. Make sure that you ran the latest point release of the major ownCloud version, e.g. 5.0.14a in the 5.0 series. If not, update to that version first (see above).
2. Make a backup of the ownCloud folder and the database.
3. Download the latest version to the working directory:

```
wget http://download.owncloud.org/community/owncloud-latest.tar.bz2
```

4. Deactivate all third party applications.
5. Delete everything from your ownCloud installation directory, except data and config. Assuming that it’s your working directory, you could execute this command:

```
ls | grep -v 'data|config' | xargs rm -r
```

6. Unpack the release tarball in the ownCloud directory (or copy the files thereto). Assuming that your installation directory is called ‘owncloud’ and that it’s inside your working directory, you could execute this command:

```
tar xvj owncloud-latest.tar.bz2
```

7. Set the permissions properly
8. With the next page request the update procedures will run.

9. If you had 3rd party applications, check if they provide versions compatible with the new release. If so, install and enable them, update procedures will run if needed.

## 4.3 Restoring ownCloud

To restore an ownCloud installation there are three main things you need to restore:

1. The config folder
2. The data folder
3. The database

### 4.3.1 Restore Folders

---

**Note:** This guide assumes that your previous backup is called “owncloud-dirbkp”

---

Simply copy your config and data folder (or even your whole ownCloud install and data folder) to a place outside of your ownCloud environment. You could use this command:

```
rsync -Aax owncloud-dirbkp/ owncloud/
```

### 4.3.2 Restore Database

---

**Note:** This guide assumes that your previous backup is called “owncloud-sqlbkp.bak”

---

#### MySQL

MySQL is the recommended database engine. To backup MySQL:

```
mysql -h [server] -u [username] -p[password] < owncloud-sqlbkp.bak
```

#### SQLite

```
sqlite3 data/owncloud.db .dump < owncloud-sqlbkp.bak
```

#### PostgreSQL

```
PGPASSWORD="password" pg_restore -c -d owncloud -h [server] -U [username] owncloud-sqlbkp.bak
```

## 4.4 Migrating ownCloud Installations

To migrate an ownCloud install, follow those steps:

1. Backup data/config folders and your database (look at “Backing Up ownCloud”)

2. Move your data
3. Restore your data/config folders and your database (look at “Restore ownCloud”)
4. Update config.php of any changes to your database connection

# ISSUES

If you think you have found a bug in ownCloud, please:

- Search for a solution
- Double check your configuration

If you can't find a solution, please file an issue:

- If the issue is with the ownCloud server, report it to the [GitHub core repository](#)
- If the issue is with the ownCloud client, report it to the [GitHub mirall repository](#)
- If the issue with with an ownCloud app, report it to where that app is developed
  - If the app is listed [here](#) report it to the correct repository
  - If the app is listed [here](#) report it to the apps repository

Please note that the mailing list should not be used for bug reports, as it is hard to track them there.



# INDICES AND TABLES

- *genindex*